



AGENDA

October 26, 2021

7:30 p.m.

LOCATION:

This meeting will be held **virtually**. Any member of the public interested in participating in the meeting should email the Township at authority@upperuwchlan-pa.gov for a link and a password to join in the meeting. If you require special accommodation, please call the Township office at 610-458-9400.

	Packet Page #
I. Call to Order	
II. Approval of Minutes: September 28, 2021	2
III. Approval of Payments: October 2021	5
IV. Treasurer's Report	12
V. Authority Administration Reports	
A. Clean Water, Inc. Monthly Report	18
B. ARRO Consulting Monthly Report	20
C. Authority Administrator's Report	44
D. Public Works Department Report	45
VI. Open Session	
VII. Next Meeting Date: November 23, 2021 ~ 7:30 p.m.	
VIII. Adjournment	



MEETING MINUTES
September 28, 2021
7:30 PM
DRAFT

In attendance via video teleconference: B. Watts, Chairman, H. Harper, Vice-Chairman, D. Carlson, Member, William Quinn, member, G. Matthew Brown, P.E., DEE, Authority Administrator and David Schlott, Jr, P.E., ARRO Consulting, Inc.

Call to Order

B. Watts, Chairman, called the meeting to order at 7:30 PM.

Approval of Minutes

Draft minutes of the August 24, 2021 meeting were presented. D. Carlson made a motion to approve the minutes as submitted. H. Harper seconded. It was so moved.

Approval of Payments

Following a brief discussion and questions, a motion was made by D. Carlson to approve the payments for September 2021. W. Quinn seconded. It was so moved. Following a brief discussion and questions D. Carlson moved to accept the balance sheet and the statement of revenue and expenses as submitted in good faith by the Township Treasurer. W. Quinn seconded. It was so moved.

Authority Administration Reports

M. Brown noted that all facilities were operating well and within permit.

M. Brown provided a monthly update on land available for disposal. He noted no change in the status of the sites they were reviewing.

Three homeowners adjacent to the proposed Toll Brothers project at 100 Greenridge Road were in attendance. M. Brown shared that he met with Toll Brothers regarding the sanitary sewage disposal capacity of the site at 100 Greenridge Road. He noted that Toll's preliminary testing showed 20,000 to 22,000 gpd of disposal capacity. The development proposed would require less than 15,000 gpd capacity. M. Brown warned that this was very preliminary in nature, and he shared that he recently received a copy of Toll's soil tests for ARRO to review and he had requested Toll to arrange a site meeting with PADEP to discuss and review the project. He noted there were a number of steps yet to be completed before any disposal area was approved for the area. He

also noted this would be treated effluent, not raw sewage proposed for disposal. Several questions and comments were put forth by the Authority members and the attending homeowners. The Authority unanimously requested M. Brown keep them informed of the progress.

M. Brown noted that comments on the Draft Act 537 Plan had been received from the Chester County planning commission and the Upper Uwchlan Township Planning Commission. He said ARRO prepared responses to the comments and submitted them to the Township Planning commission. He also noted that he and Bill Bohner, ARRO, would be attending the October meeting of the Township Planning Commission. M. Brown then advised the Authority of the Selester Robinson delinquent account. He noted that two options had been proposed to the Township Solicitor who had been pursuing collection with the homeowner. As of July 2021, they owed \$10,082.00 as principal and \$49,306.01 as penalties/interest.

The two options discussed with the Township Solicitor are:

- 1) Do nothing and wait until he is out on bankruptcy in 7 years to collect full amount of debt; or
- 2) Agree to reduce the penalty/interest to 25% of what is owed. The Township would file an amended proof of claim and would receive payment overtime from the bankruptcy court. As part of this agreement the property owner would be required to stay current on new trash and sewer bills.

After several questions and a brief discussion H. Harper moved to accept Option no. 2; W. Quinn seconded. It was so moved.

M. Brown then noted they had received the draft WQM permit for Phase III of the Route 100 WWTF. He noted that he, the operator and the engineer were very unpleasantly surprised by broad changes to the permit requirements. He said a subsequent telephone conversation with PADEP revealed the developer's engineer had posed operational changes during their "shepherding" of the permit application that were not approved nor discussed with the Authority or Township beforehand. These changes would eliminate current treatment trains (processes) and require a tertiary method of treatment that to date was not included in the design. With the Authority paying approximately 79% of the capital expense of the Phase III construction this would greatly increase the cost to the Authority as well as greatly increase operating costs. He noted that a further telephone conversation with the developer that involved the Authority Solicitor was held advising them of the Authority's displeasure and that the Authority would not agree to the permit as drafted. M. Brown then held a subsequent telephone conference with PADEP stating the developer's engineer had no authority or business negotiating discharge or treatment criteria on behalf of the Authority and that all future communication was to be directly with the Authority representatives. He noted that PADEP was open to modifications to the draft permit that would be more in line with the proposed Phase III treatment systems. He was currently awaiting a reissuance of the draft permit more in line with the proposed treatment facilities and that would be financially reasonable from an operating cost perspective. He advised keeping the Authority Solicitor involved in the event any legal action was necessary.

M. Brown updated the Authority on the Byers Road main extension project where the contractor hit a gas main that according to the contractor was mismarked by PECO.

This shut down Route 100 for a day and would delay the project at least a week. He also expected costs associated with the needed response to the emergency to be forthcoming.

Following several additional questions and a brief discussion on the reports, D. Carlson then moved to accept the Authority Administrators' Reports as submitted. H. Harper seconded. It was so moved.

Open Session

While three members of the public were in attendance, they chose to offer no further comment at that time.

Next Meeting Date: October 26, 2021 - 7:30 PM

B. Watts noted the date and time of the next meeting of the Authority. M. Brown noted that the meeting could be virtual, in-person or a hybrid at the Authority's discretion.

Adjournment

There being no further business to be brought before the Authority, W. Quinn moved, seconded by H. Harper to adjourn the meeting at 8:14 PM.

Respectfully submitted,

G. Matthew Brown, P.E., DEE
Authority Administrator

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 1

Range of Checking Accts: MA MERIDIAN to MA MERIDIAN Range of Check Ids: 2652 to 2678
Report Type: All Checks Report Format: Super Condensed Check Type: Computer: Y Manual: Y Dir Deposit: Y

Check #	Check Date	Vendor	Amount Paid	Reconciled/Void	Ref Num
2652	09/28/21	MAPLEDIR MAPLE DIRECT INC	1,517.25		2496
2653	10/26/21	LOWES020 LOWES BUSINESS ACCOUNT	72.24		2510
2654	10/26/21	ALSGROUP ALS GROUP USA, CORP	691.50		2511
2655	10/26/21	AQUAP010 AQUA PA	1,460.66		2511
2656	10/26/21	AQUAPA AQUA PA	75.00		2511
2657	10/26/21	ARROC010 ARRO CONSULTING, INC.	38,263.94		2511
2658	10/26/21	ATTMOBIL AT & T MOBILITY	99.03		2511
2659	10/26/21	BUCKLO10 BUCKLEY, BRION, MCGUIRE, MORRI	245.56		2511
2660	10/26/21	CHRISFRA FRANTZ, CHRISTOPHER	1,264.25		2511
2661	10/26/21	CLEANWAT CLEAN WATER, INC.	11,330.00		2511
2662	10/26/21	DECKM010 DECKMAN MOTOR & PUMP, INC	2,122.44		2511
2663	10/26/21	EAGLHARD EAGLE HARDWARE	20.55		2511
2664	10/26/21	GENSERVE GENSERVE, INC	885.15		2511
2665	10/26/21	HOPKINS HOPKINS & SCOTT, INC	2,500.00		2511
2666	10/26/21	INKS0010 INK'S DISPOSAL SERVICE, INC.	1,812.50		2511
2667	10/26/21	KEYSTENG KEYSTONE ENGINEERING GROUP, IN	165.00		2511
2668	10/26/21	LUDWIO60 LUDWIG'S CORNER SUPPLY CO.	82.75		2511
2669	10/26/21	MCGOV020 MCGOVERN ENVIRONMENTAL, LLC	10,224.32		2511
2670	10/26/21	MJREIDER M. J. REIDER ASSOCIATES, INC.	738.50		2511
2671	10/26/21	MULLS010 MULL'S ELECTRIC, INC.	972.50		2511
2672	10/26/21	NAPA0010 NAPA AUTO PARTS	109.06		2511
2673	10/26/21	PECO0010 PECO ENERGY	18,747.89		2511
2674	10/26/21	PENNS080 PENNSYLVANIA ONE CALL	165.23		2511
2675	10/26/21	PIPEX020 PIPE XPRESS, INC.	742.29		2511
2676	10/26/21	PRED0010 PREDOC	6,598.75		2511
2677	10/26/21	RAIN-FLO RAIN-FLO IRRIGATION	5,016.20		2511
2678	10/26/21	VERIZFIO VERIZON	1,206.62		2511

Report Totals	<u>Paid</u>	<u>Void</u>	<u>Amount Paid</u>	<u>Amount Void</u>
Checks:	27	0	107,129.18	0.00
Direct Deposit:	0	0	0.00	0.00
Total:	27	0	107,129.18	0.00

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 1

Range of Checking Accts: MA MERIDIAN to MA MERIDIAN Range of Check Ids: 2652 to 2678
Report Type: All Checks Report Format: Detail Check Type: Computer: Y Manual: Y Dir Deposit: Y

Check #	Check Date	Vendor	Amount Paid	Charge Account	Account Type	Reconciled/Void Contract	Ref Num
PO #	Item	Description					Seq Acct
2652	09/28/21	MAPLEDIR MAPLE DIRECT INC					2496
21-01229	1	q4 postage - 2,975	1,517.25	06-406-000-100 Utility Billing Costs	Expenditure		1 1
2653	10/26/21	LOWES020 LOWES BUSINESS ACCOUNT					2510
21-01325	1	ma - korky 2-in complete kit	21.84	06-420-000-020 Supplies	Expenditure		1 1
21-01325	2	ma - glow in the dark	50.40	06-420-000-020 Supplies	Expenditure		2 1
			72.24				
2654	10/26/21	ALSGROUP ALS GROUP USA, CORP					2511
21-01329	1	ewing	414.90	06-420-000-030 Testing	Expenditure		19 1
21-01329	2	ewing	276.60	06-420-000-030 Testing	Expenditure		20 1
			691.50				
2655	10/26/21	AQUAP010 AQUA PA					2511
21-01326	1	528 walter ct	38.26	06-409-000-037 Water	Expenditure		1 1
21-01326	2	325 fellowship rd	1,000.45	06-409-000-037 Water	Expenditure		2 1
21-01326	3	658 collingwood terr	55.97	06-409-000-037 Water	Expenditure		3 1
21-01326	4	241 fellowship road	19.19	06-409-000-037 Water	Expenditure		4 1
21-01326	5	29 yarmouth lane	19.19	06-409-000-037 Water	Expenditure		5 1
21-01326	6	425 hemlock lane	55.97	06-409-000-037 Water	Expenditure		6 1
21-01326	7	2680 primrose court	19.19	06-409-000-037 Water	Expenditure		7 1
21-01326	8	381 lcr	38.26	06-409-000-037 Water	Expenditure		8 1
21-01326	9	111 dorothy lane	38.26	06-409-000-037 Water	Expenditure		9 1
21-01326	10	119 prescott drive	19.19	06-409-000-037 Water	Expenditure		10 1
21-01326	11	439 prescott drive	21.46	06-409-000-037 Water	Expenditure		11 1
21-01326	12	100 prescott drive	19.19	06-409-000-037 Water	Expenditure		12 1
21-01326	13	meadow creek lane	19.19	06-409-000-037 Water	Expenditure		13 1
21-01326	14	208 flagstone road	21.73	06-409-000-037 Water	Expenditure		14 1
21-01326	15	1 prospect hill blvd	55.97	06-409-000-037 Water	Expenditure		15 1

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 2

Check #	Check Date	Vendor	Amount Paid	Charge Account	Account Type	Reconciled/Void Contract	Ref Num
PO #	Item	Description					Ref Seq Acct
2655	AQUA PA	Continued					
21-01326	16	1120 sunderland ave	19.19	06-409-000-037	Expenditure		16 1
			<u>1,460.66</u>	Water			
2656	10/26/21	AQUAPA AQUA PA					2511
21-01327	1	q2 reads	75.00	06-406-000-100	Expenditure		17 1
				Utility Billing Costs			
2657	10/26/21	ARROC010 ARRO CONSULTING, INC.					2511
21-01330	1	project 9310.32 ww system admi	11,148.25	06-400-000-002	Expenditure		21 1
				Authority Administrator			
21-01330	2	project 17000.00 consulting	3,790.00	06-408-000-000	Expenditure		22 1
				Engineering Fees			
21-01330	3	project 10270.48 byers road	16,458.01	06-408-000-000	Expenditure		23 1
				Engineering Fees			
21-01330	4	project 10270.64 milford farms	2,858.50	06-408-000-000	Expenditure		24 1
				Engineering Fees			
21-01330	5	project 10270.71 act 537	1,364.25	06-408-000-000	Expenditure		25 1
				Engineering Fees			
21-01330	6	project 10270.72 meadow creek	1,175.75	06-408-000-000	Expenditure		26 1
				Engineering Fees			
21-01330	7	project 10270.75 upland farms	1,469.18	06-408-000-000	Expenditure		27 1
			<u>38,263.94</u>	Engineering Fees			
2658	10/26/21	ATTMOBIL AT & T MOBILITY					2511
21-01328	1	september services	99.03	06-409-000-032	Expenditure		18 1
				Telephone			
2659	10/26/21	BUCKL010 BUCKLEY, BRION, MCGUIRE, MORRI					2511
21-01331	1	september services	245.56	06-404-000-000	Expenditure		28 1
				Legal Fees			
2660	10/26/21	CHRISFRA FRANTZ, CHRISTOPHER					2511
21-01333	1	ma - september services	1,264.25	06-404-000-000	Expenditure		30 1
				Legal Fees			
2661	10/26/21	CLEANWAT CLEAN WATER, INC.					2511
21-01332	1	monthly operations	11,330.00	06-420-000-045	Expenditure		29 1
				Contracted Services			
2662	10/26/21	DECKM010 DECKMAN MOTOR & PUMP, INC					2511
21-01334	1	aqua aerobic aerator	2,122.44	06-420-000-025	Expenditure		31 1
				Maintenance & Repair			
2663	10/26/21	EAGLHARD EAGLE HARDWARE					2511
21-01335	1	hose washer, brush	9.57	06-420-000-020	Expenditure		32 1
				Supplies			
21-01335	2	spray paint	10.98	06-420-000-020	Expenditure		33 1
			<u>20.55</u>	Supplies			

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 3

Check #	Check Date	Vendor	Amount Paid	Charge Account	Account Type	Reconciled/Void Contract	Ref Num
PO #	Item	Description					Ref Seq Acct
2664	10/26/21	GENSERVE GENSERVE, INC					2511
21-01336	1	service to repair gear screws	885.15	06-420-000-025 Maintenance & Repair	Expenditure		34 1
2665	10/26/21	HOPKINS HOPKINS & SCOTT, INC					2511
21-01337	1	upland farms drip fields	2,500.00	06-420-000-045 Contracted Services	Expenditure		35 1
2666	10/26/21	INKS0010 INK'S DISPOSAL SERVICE, INC.					2511
21-01338	1	september plant cleanings	1,812.50	06-420-000-025 Maintenance & Repair	Expenditure		36 1
2667	10/26/21	KEYSTENG KEYSTONE ENGINEERING GROUP, IN					2511
21-01339	1	remote support for ransomware	165.00	06-408-000-000 Engineering Fees	Expenditure		37 1
2668	10/26/21	LUDWI060 LUDWIG'S CORNER SUPPLY CO.					2511
21-01340	1	ma - tape, hose	56.97	06-420-000-020 Supplies	Expenditure		38 1
21-01340	2	ma - corner brace	18.99	06-420-000-020 Supplies	Expenditure		39 1
21-01340	3	ma - paint	6.79	06-420-000-020 Supplies	Expenditure		40 1
			82.75				
2669	10/26/21	MCGOV020 MCGOVERN ENVIRONMENTAL, LLC					2511
21-01341	1	eaglepointe	351.90	06-420-000-031 Pump & Haul	Expenditure		41 1
21-01341	2	eaglepointe	351.90	06-420-000-031 Pump & Haul	Expenditure		42 1
21-01341	3	eaglepointe	404.69	06-420-000-031 Pump & Haul	Expenditure		43 1
21-01341	4	eaglepointe	351.90	06-420-000-031 Pump & Haul	Expenditure		44 1
21-01341	5	reserve @ eagle, milford/font	2,672.89	06-420-000-031 Pump & Haul	Expenditure		45 1
21-01341	6	lakeridge	809.37	06-420-000-031 Pump & Haul	Expenditure		46 1
21-01341	7	saybrooke	307.91	06-420-000-031 Pump & Haul	Expenditure		47 1
21-01341	8	route 100	77.63	06-420-000-031 Pump & Haul	Expenditure		48 1
21-01341	9	route 100	4,740.87	06-420-000-031 Pump & Haul	Expenditure		49 1
21-01341	10	route 100	77.63	06-420-000-031 Pump & Haul	Expenditure		50 1
21-01341	11	route 100	77.63	06-420-000-031 Pump & Haul	Expenditure		51 1
			10,224.32				
2670	10/26/21	MJREIDER M. J. REIDER ASSOCIATES, INC.					2511
21-01343	1	eaglepointe	77.00	06-420-000-030 Testing	Expenditure		53 1

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 4

Check #	Check Date	Vendor	Amount Paid	Charge Account	Account Type	Reconciled/Void Contract	Ref Num
PO #	Item	Description					Ref Seq Acct
2670	M. J. REIDER ASSOCIATES, INC. Continued						
21-01343	2	greenridge	108.50	06-420-000-030 Testing	Expenditure		54 1
21-01343	3	lakeridge	108.50	06-420-000-030 Testing	Expenditure		55 1
21-01343	4	saybrooke	42.00	06-420-000-030 Testing	Expenditure		56 1
21-01343	5	st. andrews	77.00	06-420-000-030 Testing	Expenditure		57 1
21-01343	6	eaglepointe	73.50	06-420-000-030 Testing	Expenditure		58 1
21-01343	7	reserve,eagle hunt,byers,ewing	56.00	06-420-000-030 Testing	Expenditure		59 1
21-01343	8	rt 100	77.00	06-420-000-030 Testing	Expenditure		60 1
21-01343	9	st. andrews	119.00	06-420-000-030 Testing	Expenditure		61 1
			<u>738.50</u>				
2671	10/26/21	MULLS010 MULL'S ELECTRIC, INC.					2511
21-01342	1	upland farms wwtp	972.50	06-420-000-025 Maintenance & Repair	Expenditure		52 1
2672	10/26/21	NAPA0010 NAPA AUTO PARTS					2511
21-01344	1	hose, hose clamp	42.14	06-420-000-020 Supplies	Expenditure		62 1
21-01344	2	hose, hose clamp	42.14	06-420-000-020 Supplies	Expenditure		63 1
21-01344	3	hose for generator	24.78	06-420-000-020 Supplies	Expenditure		64 1
			<u>109.06</u>				
2673	10/26/21	PECO0010 PECO ENERGY					2511
21-01347	1	304 fellowship road	109.12	06-409-000-036 Electric	Expenditure		68 1
21-01347	2	2500 eagle farms road	765.33	06-409-000-036 Electric	Expenditure		69 1
21-01347	3	seabury lane	34.04	06-409-000-036 Electric	Expenditure		70 1
21-01347	4	primrose court	358.49	06-409-000-036 Electric	Expenditure		71 1
21-01347	5	314 prescott drive	365.34	06-409-000-036 Electric	Expenditure		72 1
21-01347	6	meadow creek lane	33.42	06-409-000-036 Electric	Expenditure		73 1
21-01347	7	301 pottstown pike	525.63	06-409-000-036 Electric	Expenditure		74 1
21-01347	8	kristines/milford	97.57	06-409-000-036 Electric	Expenditure		75 1
21-01347	9	711 dorian road	318.55	06-409-000-036 Electric	Expenditure		76 1
21-01347	10	111 dorothy lane	80.05	06-409-000-036 Electric	Expenditure		77 1

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 5

Check #	Check Date	Vendor		Amount Paid	Charge Account	Account Type	Reconciled/Void Contract	Ref Num	
PO #		Item Description						Ref Seq	Acct
2673	PECO ENERGY	Continued							
21-01347	11	dorlan drive		1,452.02	06-409-000-036 Electric	Expenditure		78	1
21-01347	12	381 lcr		219.40	06-409-000-036 Electric	Expenditure		79	1
21-01347	13	milford road		28.82	06-409-000-036 Electric	Expenditure		80	1
21-01347	14	st. andrews		36.59	06-409-000-036 Electric	Expenditure		81	1
21-01347	15	park road		1,849.55	06-409-000-036 Electric	Expenditure		82	1
21-01347	16	55 pottstown pike		576.17	06-409-000-036 Electric	Expenditure		83	1
21-01347	17	yarmouth lane		211.66	06-409-000-036 Electric	Expenditure		84	1
21-01347	18	sunderland ave		2,830.26	06-409-000-036 Electric	Expenditure		85	1
21-01347	19	kiloran wynd drive		168.38	06-409-000-036 Electric	Expenditure		86	1
21-01347	20	flagstone road		985.74	06-409-000-036 Electric	Expenditure		87	1
21-01347	21	yarmouth lane		38.27	06-409-000-036 Electric	Expenditure		88	1
21-01347	22	140 pottstown pike		216.43	06-409-000-036 Electric	Expenditure		89	1
21-01347	23	275 fellowship road		6,409.90	06-409-000-036 Electric	Expenditure		90	1
21-01347	24	heron hill drive		168.02	06-409-000-036 Electric	Expenditure		91	1
21-01347	25	indian springs drive		107.81	06-409-000-036 Electric	Expenditure		92	1
21-01347	26	yarmouth lane		55.97	06-409-000-036 Electric	Expenditure		93	1
21-01347	27	hemlock lane		77.14	06-409-000-036 Electric	Expenditure		94	1
21-01347	28	fellowship road		628.22	06-409-000-036 Electric	Expenditure		95	1
				<u>18,747.89</u>					
2674	10/26/21	PENNS080 PENNSYLVANIA ONE CALL						2511	
21-01345	1	monthly activity		165.23	06-420-000-329 PA One Call	Expenditure		65	1
2675	10/26/21	PIPEX020 PIPE XPRESS, INC.						2511	
21-01350	1	s80 couplings		742.29	06-420-000-020 Supplies	Expenditure		99	1
2676	10/26/21	PRED0010 PREDOC						2511	
21-01346	1	marsh harbor - sbr tank clean		4,492.50	06-420-000-025 Maintenance & Repair	Expenditure		66	1

October 22, 2021
01:55 PM

Upper Uwchlan Township
Check Register By Check Id

Page No: 6

Check #	Check Date	Vendor	Amount Paid	Charge Account	Account Type	Reconciled/Void Contract	Ref Num
PO #	Item	Description					Ref Seq Acct
2676	PREDOC	Continued					
21-01346	2	marsh harbor - aerator repair	2,106.25	06-420-000-025	Expenditure		67 1
			<u>6,598.75</u>	Maintenance & Repair			
2677	10/26/21	RAIN-FLO RAIN-FLO IRRIGATION					2511
21-01348	1	sprinkler, regulator, nipple	5,016.20	06-420-000-025	Expenditure		96 1
				Maintenance & Repair			
2678	10/26/21	VERIZFIO VERIZON					2511
21-01349	1	internet	132.40	06-409-000-032	Expenditure		97 1
				Telephone			
21-01349	2	october service	1,074.22	06-409-000-032	Expenditure		98 1
			<u>1,206.62</u>	Telephone			

Report Totals	<u>Paid</u>	<u>Void</u>	<u>Amount Paid</u>	<u>Amount Void</u>
Checks:	27	0	107,129.18	0.00
Direct Deposit:	<u>0</u>	<u>0</u>	<u>0.00</u>	<u>0.00</u>
Total:	<u>27</u>	<u>0</u>	<u>107,129.18</u>	<u>0.00</u>

Upper Uwchlan Township Municipal Authority

Balance Sheet

As of September 30, 2021

ASSETS

<u>Cash</u>		
06-100-000-010	General Checking - Fulton Bank	\$ 154,881.44
06-100-000-015	General Checking - Meridian Bank	414,192.74
06-100-000-020	General Checking - WIPP	536,191.33
06-106-000-002	Connection Fee Account	692,810.65
06-110-000-100	Fulton Bank Bond Proceeds - ICS	-
06-110-000-200	Fulton Bank Bond Proceeds - MMDA	5,362,558.65
	Total Cash	7,160,634.81
<u>PSDLAF Investments:</u>		
06-109-000-003	CD Program	-
06-109-000-004	Full Flex	188.21
		188.21
	Total Investments	188.21
<u>Accounts Receivable</u>		
06-145-000-001	Usage Fees Receivable	285,988.16
06-145-000-002	Capital Assessment Receivable	
06-147-000-000	Misc Accounts Receivable	546.00
	Total Accounts Receivable	286,534.16
<u>Other Current Assets</u>		
06-130-000-001	Due from MA Capital Fund	-
06-130-000-002	Due from UUT General Fund	-
06-130-000-003	Due from UUT Capital Fund	-
06-130-000-004	Due from Solid Waste Fund	10,423.83
06-130-000-005	Due from Stormwater Fund	-
06-130-000-006	Due from Sewer Fund	-
06-152-000-000	Undeposited Funds	-
06-155-000-000	Pre-Paid Expenses	-
06-155-000-010	Pre-Paid Attorney Fees	-
	Total Other Current Assets	10,423.83
<u>Fixed Assets</u>		
06-162-000-001	Fixed Assets	2,538,084.22
06-162-000-050	Accumulated Depreciation	(629,995.36)
06-163-000-100	Phase II Construction Project (CIP)	191,298.51
	Total Fixed Assets	2,099,387.37
<u>Other Long Term Assets</u>		
06-162-000-002	Excess Treatment Capacity	1,649,293.24
	Total Other Long Term Assets	1,649,293.24
	Total Assets	\$ 11,206,461.62

Upper Uwchlan Township Municipal Authority
Balance Sheet
As of September 30, 2021

LIABILITIES AND FUND BALANCE

<u>Current Liabilities</u>		
06-200-000-020	Accounts Payable	-
06-230-000-010	Due to UUT General Fund	76,986.53
06-230-000-020	Due to UUT Capital Fund	-
06-230-000-021	Due to MA Capital Fund	-
06-230-000-030	Due to Solid Waste Fund	56,300.04
06-230-000-040	Due to Water Resource Protection Fund	-
06-230-000-050	Due to Sewer Fund	-
06-230-000-060	Due to Developer's Escrow Fund	-
06-230-000-070	Due to UUT Sewer Fund - 2019 Bonds	5,205,556.07
06-240-000-000	Accrued Expenses	38,263.94
06-241-000-100	Retainage on Phase II Construction Project	-
06-245-000-000	Due to Customers	275.00
	Total Current Liabilities	5,377,381.58
<u>Equity</u>		
06-272-000-001	Opening Bal Equity	753,500.35
06-272-000-002	Retained Earnings	4,256,486.92
	Current Period Net Income (Loss)	819,092.77
	Total Equity	5,829,080.04
	Total Fund Balance	5,829,080.04
	Total Liabilities & Fund Balance	\$ 11,206,461.62

Upper Uwchlan Township Municipal Authority
Statement of Revenues and Expenditures

For the Period Ended September 30, 2021

	Actual 2021 YTD	Budget 2021	% of Budget	Actual 2020 <i>(audited)</i>	Budget 2020
REVENUES					
06-340-000-000 Interest Income	\$ 4,311.23	\$ 43,500.00	9.9%	36,969.00	\$ 80,000.00
06-365-000-000 Usage Fees Residential	1,793,223.91	2,250,000.00	79.7%	2,276,275.00	2,293,851.00
06-365-000-001 Usage Fees Commercial	69,369.24	100,000.00	69.4%	97,168.00	-
06-365-000-010 Connection Fees	291,828.22	4,677,750.00	6.2%	51,571.00	1,622,250.00
06-365-000-015 Sewer - resident refunds	-	-	#DIV/0!	(88.00)	-
06-354-000-020 Grant revenue - State	7,050.00	465,000.00	1.5%	11,471.00	-
06-370-000-000 Misc revenue	-	1,000.00	0.0%	-	1,000.00
TOTAL REVENUES	\$ 2,165,782.60	\$ 7,537,250.00	28.7%	\$ 2,473,366.00	\$ 3,997,101.00
EXPENDITURES					
<u>General:</u>					
06-400-000-001 Administration	203,878.53	264,736.00	77.0%	245,253.00	273,821.00
06-400-000-002 Authority Administrator	93,621.10	120,000.00	78.0%	124,394.00	120,000.00
06-400-000-003 Professional Fees	-	5,000.00	0.0%	-	12,000.00
06-400-000-200 Admin Supplies	520.00	1,000.00	52.0%	299.00	1,000.00
06-400-000-341 Advertising	154.78	3,000.00	5.2%	2,928.00	5,000.00
06-400-000-352 Insurance - Liability	3,868.35	5,370.00	72.0%	4,112.00	5,370.00
06-400-000-355 Bank Fees	123.00	650.00	18.9%	97.00	650.00
06-402-000-450 Audit Fees	6,050.00	7,500.00	80.7%	5,800.00	5,450.00
06-404-000-000 Legal Fees	9,672.53	25,000.00	38.7%	5,460.00	25,000.00
06-406-000-100 Utility Billing Costs	7,377.20	13,000.00	56.7%	12,608.00	12,000.00
06-408-000-000 Engineering Fees	269,386.85	150,000.00	179.6%	410,263.00	175,000.00
06-408-000-100 Reimbursable Engineering Fees	-	-	#DIV/0!	-	-
	594,652.34	595,256.00	99.9%	811,214.00	635,291.00
<u>Building Expenses:</u>					
06-409-000-031 Lawn Care	-	5,000.00	0.0%	-	5,000.00
06-409-000-032 Telephone	12,372.80	15,000.00	82.5%	15,305.00	15,000.00
06-409-000-035 Insurance	8,169.15	15,000.00	54.5%	12,336.00	11,078.00
06-409-000-036 Electric	167,132.23	250,000.00	66.9%	194,595.00	250,000.00
06-409-000-037 Water	20,603.00	20,000.00	103.0%	11,921.00	20,000.00
06-409-000-052 Bldg Maint & Repair	-	10,000.00	0.0%	-	10,000.00
06-409-000-260 Building Supplies & Small Tools	-	15,000.00	0.0%	-	15,000.00
06-409-000-427 Waste Disposal	-	-	#DIV/0!	-	-
	208,277.18	330,000.00	63.1%	234,157.00	326,078.00
<u>Operations:</u>					
06-420-000-020 Supplies	14,372.95	50,000.00	28.7%	25,453.00	50,000.00
06-420-000-022 Chemicals	9,444.75	15,000.00	63.0%	8,096.00	15,000.00
06-420-000-023 Propane and Fuel Oil	-	5,000.00	0.0%	2,991.00	5,000.00
06-420-000-025 Maintenance & Repair	89,194.33	120,000.00	74.3%	158,210.00	120,000.00
06-420-000-030 Testing	28,785.66	35,000.00	82.2%	36,203.00	35,000.00
06-420-000-031 Pump & Haul	73,345.38	60,000.00	122.2%	100,218.00	50,000.00
06-420-000-032 Vegetation Management	9,648.86	20,000.00	48.2%	5,895.00	20,000.00
06-420-000-035 Permits	3,102.00	5,000.00	62.0%	2,878.00	5,000.00
06-420-000-042 Dues and Memberships	-	-	#DIV/0!	75.00	-
06-420-000-045 Contracted Services	104,380.00	150,000.00	69.6%	161,528.00	150,000.00
06-420-000-048 Misc expenses	887.70	10,000.00	8.9%	284.00	10,000.00
06-420-000-235 Vehicle Maintenance	372.87	2,000.00	18.6%	-	2,000.00
06-420-000-329 PA One Call	1,133.38	2,500.00	45.3%	1,875.00	2,500.00
	334,667.88	474,500.00	70.5%	503,706.00	464,500.00

Upper Uwchlan Township Municipal Authority
Statement of Revenues and Expenditures

For the Period Ended September 30, 2021
(Continued)

		Actual 2021 YTD	Budget 2021	% of Budget	Actual 2020 <i>(Unaudited)</i>	Budget 2020
	<u>Capital:</u>					
06-483-000-000	Capital Repair	42,624.45	100,000.00	42.6%	-	50,000.00
06-483-000-100	Capital Construction	-	2,700,000.00	0.0%	-	1,500,000.00
06-493-000-083	Depreciation	-	100,000.00	0.0%	126,102.00	100,000.00
		42,624.45	2,900,000.00	1.5%	126,102.00	1,650,000.00
Total Expenditures before Operations Agreement and Transfers		\$ 1,180,221.85	\$ 4,299,756.00	27.4%	\$ 1,675,179.00	\$ 3,075,869.00
Net Income before Operations Agreement and Transfers		\$ 985,560.75	\$ 3,237,494.00	30.4%	798,187.00	921,232.00
	<u>Other:</u>					
06-471-000-010	Operations Agreement Fee to UUT-2014 Bonds	-	-	0.0%	-	-
06-471-000-020	Operations Agreement Fee to UUT-2019 Bonds	103,369.58	236,744.00	43.7%	237,408.00	237,494.00
06-471-000-030	Operations Agreement Fee to UUT-2019A Bonds	63,098.40	336,200.00	18.8%	335,280.00	335,300.00
		166,467.98	572,944.00	29.1%	572,688.00	572,794.00
06-492-000-010	Transfer to Sewer Fund	-	-	#DIV/0!	-	-
06-492-000-020	Transfer to Water Resource Protection Fund	-	-	#DIV/0!	-	-
06-492-000-030	Transfer to UUT Capital Fund	-	-	#DIV/0!	-	-
		-	-	#DIV/0!	-	-
TOTAL EXPENDITURES		\$ 1,346,689.83	\$ 4,872,700.00	27.6%	\$ 2,247,867.00	\$ 3,648,663.00
OPERATING INCOME		\$ 819,092.77	\$ 2,664,550.00	30.7%	\$ 225,499.00	\$ 348,438.00

Upper Uwchlan Township Municipal Authority
Sewer Billings

Month to Month Change in Receivables and Collections

	September 2021	August 2021	Change
Beginning Receivable Balance	289,022.06	289,022.06	-
<u>Billings:</u>			
Calculated charges billed	1,752,870.21	1,749,043.66	3,826.55
Billing adjustments			-
Late payment penalty	93,031.38	64,342.12	28,689.26
Adjustments	(7,003.65)	(5,932.69)	(1,070.96)
	2,127,920.00	2,096,475.15	31,444.85
<u>Less:</u>			
Collections*	1,862,403.15	1,744,009.07	(118,394.08)
Receivable balance, month end	265,516.85	352,466.08	(86,949.23)

This report includes all sewer billings, not just delinquent accounts.

Upper Uwchlan Township Municipal Authority
Sewer Billings

Month to Month Change in Delinquent Accounts

(accounts that have had a balance in excess of \$380 for 2 or more quarters)

	9/30/2020	4/30/2021	6/30/2021	7/31/2021	8/31/2021	9/30/2021
Number of delinquent accounts	162	118	136	109	177	139
Total delinquent balance	\$ 222,223	\$ 217,040	\$ 240,052	\$ 210,043	\$ 220,952	\$ 149,547

2021 Payment Schedule

	<u>Bills Mailed</u>	<u>Payment Due</u>
First quarter	1/31/2021	3/1/2021
Second quarter	4/30/2021	5/31/2021
Third quarter	7/31/2021	8/31/2021
Fourth quarter	10/31/2021	11/30/2021

Clean Water, Inc.

170 Dallas St.
Box 475
Atglen, Pa. 19310

Phone 610-593-5710
Fax 610-593-6311

October 21, 2021

Upper Uwchlan Township Municipal Authority
140 Pottstown Pike
Chester Springs, PA 19425

RE: Report for the October meeting

Dear Authority,

Enclosed please find the monthly report that was submitted to the DEP on your behalf. The reports are for July, informational items are current.

Route 100

We had Ehrlich out to re-spray the lagoons at Route 100 for weeds again. This is included in the contract price. There should not be a charge for this. The pumps and motors from the Upland Farms drip system were at Deckmans for rebuild. Unfortunately, their shop got flooded which did some additional damage to the units. Their insurance will cover the work, but it will delay the completion. We had Dynatek out to look at the transfer switch at the Reserve 2 pump station. It was not working correctly. It has been returned to service. Unrelated, the number one pump was pulled and sent for repair. This is an original pump. It was not worth rebuilding. Matt approved the order of a new one. McGovern cleaned both of Reserve's stations. The fields at Ewing West Vincent (EWV), Byers, Reserve and St. Elizabeth are in various stages of being cut and harvested. There was some damage at the access road for the upper EWV field because of the heavy rains in September. Public Works is aware. We continue to work with ARRO on fine tuning the draft renewal for phase three of the plant. There have been some challenges. Certain Matt has reported them to you.

Eaglepointe

Plant is running ok. We had sludge removed.

Marsh Harbour

Plant is running fine. Predoc did complete the removal of the debris from the SBR basin. The lagoon is nearing low level.

Lakeridge

Plant is running fine. There were no operational issues of note.

Clean Water, Inc. Wastewater Treatment Specialists

Saybrooke

Facility is running fine. We have completed the majority of the permit renewal. ARRO is working on the comprehensive ground water report that will be included with the submittal. Predoc was out to check out the discharge assembly on the pump station. The flange is leaking and will need repaired. I also asked them to replace several of the floats which were needed.

Greenridge

Drip continues. Ehrlich was out to spray the rip rap in the lagoon for weeds. Again, this is included. We then removed the standing grasses.

St. Andrews

Plant is running fine. There were no operational issues to report.

That is all for now, please call with any questions.

Respectfully,

Brian Norris



321 N. Furnace Street
Suite 200
Birdsboro, PA 19508
T 610.495.0303
F 610.495.5855

MEMORANDUM

TO: Upper Uwchlan Township Municipal Authority

FROM: G. Matthew Brown, P.E., DEE

RE: Project Status Report

PROJECT NO.: 17000.00

DATE: October 20, 2021

The following is the status of current wastewater projects within the Township:

Byers Station

Village at Byers Station (5C), Lot #1 Townhouse Parcel: The Village at Byers Station (Parcel 5C) pre-construction meeting was held on October 18, 2017. Construction is expected to start within three weeks. The Village at Byers Station (Parcel 5C) site contractor, by email dated November 14, 2017, started submitting its sanitary sewer shop drawing submittals. ARRO reviewed and commented on the submittals. Brubacher Excavating started sanitary sewer installation work on January 4, 2018. The Village of Byers Station (5C) sanitary sewer installation work continues through February 2018, approximately 40% of the sewer mains and laterals have been installed. Sanitary sewer installation work continues through March 2018. As of mid-April 2018, all sanitary sewer mains and laterals have been installed and air tested, while 75 percent of the sewer mains have also passed deflection testing. As of mid-May 2018, all sanitary sewer mains have passed pressure and deflection testing and only manhole vacuum testing remains to be done after base paving is completed. Vacuum testing of each sanitary sewer manhole on the site was completed on July 11, 2018. ARRO approved escrow release No. 1 in the amount of \$302,330.01 by letter dated September 6, 2018. Installation of the gravity house service line to each new townhouse began on September 13, 2018. ARRO reviewed the sanitary sewer videos submitted by Toll Brothers on October 19, 2018. The pipe is in good condition with only minor debris in a few runs that need to be flushed and cleaned. ARRO emailed Toll Brothers on November 2, 2018 with a list of the runs that needed cleaned. Installation of the last four house service lines to new townhouses was completed on March 3, 2021. ARRO received an August 10, 2021 email from Toll Brothers requesting ARRO observe the current condition of the sanitary sewer and prepare a list of items to complete ahead of sanitary sewer system dedication. ARRO will conduct the work the week of August 23, 2021. ARRO completed its observations of the current condition of the sanitary sewer installed as part of Lot #1 (and through Lot #2A) and prepare a list of items to complete. ARRO prepared a September 16, 2021 letter to Toll Brothers including the sanitary sewer list of items that Toll needs to complete for dedication.

ARRO completed its observations of two additional manholes that were previously inaccessible and on October 11, 2021 sent Toll Brothers an email with further items that need to be completed at each manhole.

Village at Byers Station (5C), Lot #2 Residential / Commercial Parcel: ARRO reviewed the Village of Byers Station (5C) – Lot #2 Commercial Parcel's Sewage Facilities Planning Module (SFPMP) package. The Developer's engineer submitted a 9,025 gpd sanitary sewer capacity request

at the Route 100 WWTP facility. ARRO reviewed the Amended Final PRD Plans submitted by Bohler Engineering and prepared a February 27, 2018 letter to the Township with comments to the Plans. Sewage Facilities Planning Modules were sent to PADEP on April 18, 2018. ARRO reviewed Amended Final PRD Plans, last revised May 7, 2018, and submitted a May 30, 2018 letter to the Township containing comments to the Plans. Additional revised Plans were submitted on July 12, 2018 and are currently under review. The PADEP SFPM approval letter, dated June 27, 2018, was received by the Township. Vacuum testing of each sanitary sewer manhole on the site was completed on July 11, 2018. By email dated July 4, 2018, ARRO requested of Toll Brothers that they submit an agreement document between Toll and BPG Partners, Ltd. stipulating that after BPG has the binder course paving completed each manhole will again be vacuum tested and BPG will repair any manhole that fails its vacuum re-test. ARRO submitted a July 19, 2018 sanitary sewer comments letter to the Township regarding the additional revised Plans submitted by Bohler Engineering on July 12, 2018. Toll Brothers submitted a July 30, 2018 letter acknowledging it will be responsible to ensure that the sanitary manholes in 5C Commercial will be tested after construction of the commercial portion of the subdivision. Toll requests the Authority require the testing to be a component of the financial security agreement as it relates to the commercial site work. ARRO prepared an August 31, 2018 letter to the Township with comments to the latest Final PRD Plans, last revised August 30, 2018. Eight buildings with various uses are proposed with a sewer capacity of 9,025 gallons per day. On March 18, 2019, ARRO received the draft of a revised land development drawing from Bohler Engineering presenting a new layout arrangement consisting of 67 townhome units, a coffee shop, retail store and a daycare center, and also a revised sanitary sewer capacity request of 15,195 gpd. On July 9, 2019, ARRO received from Bohler Engineering Revision 1 to the Lot #2 land development drawings. The drawings now show 55 townhome units, a 1-½ story retail building and a 2-story mixed-use commercial building. There is a revised sanitary sewer capacity request of 12,872 gpd. ARRO is reviewing the sanitary sewer portion of the drawings. ARRO prepared a July 24, 2019 comments letter to the Revision 1 land development drawings. On August 20, 2019, ARRO received revised Bohler Engineering Lot #2 land development drawings, Revision 2, dated August 16, 2019. ARRO is reviewing the sanitary sewer portion of the drawings. ARRO prepared a September 3, 2019 comments letter to the sanitary sewer portion of Bohler Engineering Lot #2 land development drawings, Revision 2, dated August 16, 2019. At the October 14, 2019 UUT Board of Supervisors' meeting, it was approved to send the revised Lot #2 Commercial Parcel SFPM package to PADEP. ARRO is assisting Bohler Engineering in preparing responses to comments contained in PADEP's October 31, 2019 review letter regarding the revised Lot #2 Commercial Parcel SFPM package. The Authority Administrator sent a December 9, 2019 letter to PADEP with responses to comments contained in the October 31, 2019 review letter regarding the revised Lot #2 Commercial Parcel SFPM package. Bohler Engineering reported to PADEP on January 3, 2020 that the Authority Administrator pronounced Upper Uwchlan will own the sanitary sewer main that will run within a dedicated easement through Lot 2 and connect to the sewer in Station Boulevard. A May 22, 2020 letter to Toll Brothers was prepared under Authority letterhead stating 12,872 gpd of capacity must be purchased by Toll from the Authority for the Lot #2 residential and commercial portions of the project. ARRO received revised land development plans, dated October 8, 2020. ARRO reviewed the plans and had no additional comments to the sanitary sewer portions of the plans. ARRO reviewed the sanitary sewer escrow submitted on October 12, 2020 by Toll Brothers. ARRO prepared an October 13, 2020 letter to the Township stating it had no comments to the \$147,396.00 sanitary sewer escrow estimate. The project's preconstruction meeting was held on October 21, 2020. Work to clear and rough grade the site is expected to start at the beginning of November 2020. Sanitary sewer installation is not expected to start until February 2021. Toll Brothers submitted the project's site sanitary sewer construction bond to the Township. ARRO reviewed and commented on sanitary sewer shop drawings submitted by the site contractor, Lyons & Hohl. Toll Brothers' 55 townhomes (Lot 2A, Residential), rated at 185 gpd each, has a total sewage flow of 10,175 gpd. Toll submitted certification to ARRO documenting the repurchase of 6,560 gpd Toll originally sold to Byers Retail Acquisition Limited Partnership for the previously proposed commercial improvements of the parcel. Toll will purchase the remaining 3,615 gpd it needs at \$70 per gallon for treatment and

disposal. The total amount due from Toll to Upper Uwchlan Township Municipal Authority being \$253,050 as a single, upfront payment to the Authority. According to the Township Finance Department, Toll Brothers has paid the Township the \$253,050.00 for the 55 townhomes (Lot 2A, Residential) treatment and disposal costs. Installation of sanitary sewer is tentatively scheduled to start on January 25, 2021. Sanitary sewer construction started on January 26, 2021. Sanitary sewer construction continues. Toll Brothers submitted sewer escrow release request No. 1 in the amount of \$119,330.00. ARRO reviewed the quantities and prepared an April 12, 2021 letter to the Township recommending release of the requested amount. All sanitary sewer is installed, but not been completely tested.

Sanitary sewer manholes installed as part of Lot #1, but within Lot #2, remain to be vacuum tested now that paving has been placed around their manhole frames.

Byers Station (6C), Vantage Point–Chester Springs: The Developer's engineer submitted a request for 43 EDUs (9,500 gpd) of sanitary sewer capacity at the Route 100 WWTP facility. The Authority Administrator sent a February 20, 2018 letter to D. L. Howell stating there is sufficient capacity at the Route 100 WWTP facility for the proposed 9500 gpd from the project. ARRO reviewed the project's Sewage Facilities Planning Module (SFPM). The module shows a request for 45 EDUs (10,000 gpd) of sanitary sewer capacity. SFPM Component 3 Section G and J were signed. The Pennsylvania Historical and Museum Commission clearance letter and Aqua water service letter have been received for the Sewage Facilities Planning Module (SFPM). On April 18, 2018, the Township forwarded SFPM Components 4B and 4C to the Chester County Planning Commission and Health Department. ARRO reviewed Land Development Plans, plotted April 6, 2018, and submitted an April 30, 2018 letter to the Township containing comments to the Plans. The SFPM is complete and a resolution to accept the document was placed on the Board of Supervisors' August 20, 2018 agenda. The SFPM application package was submitted to PADEP. ARRO prepared a September 6, 2018 sanitary sewer review letter to the latest Land Development Plans submitted by D.L. Howell, last revised August 13, 2018. ARRO received on December 5, 2018 the latest Land Development Plans, last revised November 30. ARRO will submit a sanitary sewer review letter the week of December 10. ARRO prepared and sent to the Township a December 14, 2018 sanitary sewer review letter to the December 5, 2018 Land Development Plans. ARRO received and reviewed the sanitary sewer portion of land development plans Revision No. 3, dated June 21, 2019. The plans show a dedicated sanitary sewer manhole in Byers Road to be installed when the Byers Road sewer extension project is constructed. ARRO prepared and sent a July 5, 2019 review comments letter to the Township. PADEP issued a July 23, 2019 with three (3) items missing from the submitted SFPM. The Authority sent PADEP an August 23, 2019 letter in response to PADEP's July 23, 2019 letter containing three comments to the project's SFPM. The UUT Board of Supervisors at its September 16, 2019 meeting executed the amended Tentative Approval Decision to permit Parcel 6C to be developed as a senior living facility. PADEP issued a November 7, 2019 letter approving the Official Plan revision for the construction of the 101-unit retirement living apartment unit at 10,100 gpd sewage volume. ARRO reviewed the latest revision to the Vantage Point Retirement Living land development plans, dated December 6, 2019. ARRO issued a January 6, 2020 review comments letter to the Township. ARRO is reviewing the latest revision to the Vantage Point Retirement Living land development plans, dated February 3, 2020. ARRO prepared a March 6, 2020 review comments letter regarding the latest revision to the Vantage Point Retirement Living land development plans, dated February 3, 2020.

Nothing new to report.

Eagle Hunt

Nothing new to report.

Eaglepointe

Wastewater Treatment Plant: ARRO is working on a plan to convert the Eaglepointe WWTP into a pretreatment facility before sending the effluent on to the Route 100 Regional WWTP for final treatment. It is proposed to design and construct an effluent pump station for a 2-inch force main. ARRO has laid out a preliminary force main route from the Eaglepointe WWTP to the proposed Byers Road sanitary sewer extension across Route 100.

Nothing new to report.

Liberty Union Bar & Grille: Liberty Union effluent was tested and BOD, fat & oil and nitrogen results were found to be higher than the Non-Residential Waste Discharge (NRWD) resolution limits. A November 13, 2017 letter was sent to Liberty Union advising them of their discharge overages and the need to meet with the Authority Administrator, Clean Water and ARRO to discuss how Liberty Union could lower the three elevated discharges. The meeting will take place on November 30, 2017. The Authority Administrator, Clean Water and ARRO met with Liberty Union on November 30, 2017 to discuss how to lower the three elevated discharges. Liberty Union stated they will institute existing grease trap cleaning reforms and update their dish cleaning policy. Clean Water will take additional samples periodically to check the reforms. Clean Water conducted a grab sampling of Liberty Union discharges on January 31, 2018. Sampling test results for Phosphorus, BOD and Oil/Grease continue to be above the Authority's NRWD resolution limits. ARRO had a telephone discussion with Liberty Union on February 23, 2018 about high sampling results. Liberty Union requested a third sampling as a composite sample like the first sampling. The Authority Administrator authorized Clean Water to set up the new composite sampling, which was done over February 19 and 20. A lab error occurred with the sample collected on March 29, 2018. The lab scheduled another sampler collection for April 5 into April 6, 2018. ARRO has not received the latest sampling test results. ARRO transmitted the April 6, 2018 test results to Liberty Union. ARRO is preparing comments to Liberty Union questions on the test results. ARRO prepared comments to Liberty Union questions on the test results. Ten random grab samples for analysis will be taken from the Liberty Union pump station wetwell. Two grab samples have been analyzed and BOD exceeds 1000 mg/L in both samples. The results of two grab samples (collected September 25 and 27) were received and the BOD is below 500 mg/L in both. The results of seven grab samples collected between September 5 and October 10, 2018 all had BOD above the NRWD maximum 250 mg/L threshold, the highest result was 1,700 mg/L. The Authority Administrator and ARRO conducted a meeting with Liberty Union and Epicurean Garage to discuss grease traps and grease entering the sanitary sewer system. Attached is a memo dated July 22, 2021 which list the recommended additions/revisions to the Non-Residential Waste (NRW) Resolution.

Nothing new to report.

Dilibero - Go-Wireless, Eagle Car Wash and Enterprise Rent-A-Car Sanitary Sewer Connection: ARRO is conducting an evaluation of the wastewater treatment capacity and feasibility for connecting these three businesses to the Eaglepointe WWTP sanitary sewer system. ARRO completed the evaluation, including a piping layout and cost estimate, and it is now under internal review. On April 20, 2018 ARRO transmitted its sanitary sewer evaluation to Dilibero. ARRO has been responding to sanitary sewer related questions from Dilibero's sewer contractor. On March 7, 2019 ARRO transmitted the Authority's Eaglepointe sanitary sewer and easement drawings to Dilibero's engineer for use in preparing their sanitary sewer extension plans. Eagle Service Center is unwilling to consent to a sanitary sewer easement across its property. ARRO has prepared an alternative to an entirely gravity sewer design with a preliminary low-pressure force main design that crosses through the CarSense property in order to avoid the Eagle Service Center property. ARRO has communicated with the property owner's counsel and is preparing alternative sanitary sewer connection sketch designs for consideration. ARRO prepared an alternative sanitary sewer connection sketch design and on October 2, 2020 transmitted the sketch to the property owner and its counsel for consideration. On June 4, 2021 the Authority Administrator and ARRO met with the

owner regarding this project. ARRO prepared an exhibit drawing showing proposed temporary and permanent sanitary sewer easements across both the Citadel Bank and Eagle Service Center lots. The exhibits were sent to the property owners for review. If the exhibits are accepted easement agreements will be prepared. ARRO attended a July 29, 2021 meeting with Eagle Retail Associates and the prospective future owner of Eaglepointe to discuss the proposed Dilibero sanitary sewer that will cross through the Eaglepointe lot containing Citadel Credit Union. ARRO prepared exhibit drawings showing temporary and permanent sanitary sewer easements across both the Citadel Credit Union and Eagle Service Center lots. Based on initial discussions some revisions were made and easement agreements will be drafted. At ARRO direction, surveyors will be conducting boundary survey the week of September 20, 2021 for both the Citadel Credit Union and Eagle Service Center lots. Temporary and permanent easement plans and descriptions will be prepared by the surveyors for future easement agreements.

Surveyors completed the boundary survey for both Citadel Credit Union and Eagle Service Center lots. Easement plans and descriptions were submitted to ARRO on October 7, 2021 for review. ARRO prepared comments to the documents and submitted them to the surveyors on October 20, 2021.

Ewing Tract

Nothing new to report.

Fetter Farm Tract (Preserve at Marsh Creek)

ARRO received a request from a developer engineer for information on available treatment capacity to serve the Tract and met with the Township Manager and developer engineer on September 18, 2012, to discuss treatment capacity and conveyance to the Route 100 WWTP. On August 5, 2014 a meeting with held at the Township Building with The McKee Group to discuss the active adult community proposed by the Developer for the property. A subsequent meeting was held at the Township Building on August 14, 2014 with the Township, Developer and Authority Administrator to discuss sewage flows and disposal. ARRO reviewed a Conditional Use Plan for Fetter's Property prepared for McKee-Milford Associates, LP, dated October 12, 2016. ARRO prepared a review letter to the Township, dated November 8, 2016. The Developer is proposing 375 Housing Units, which will produce 62,675 gallons per day of sanitary sewer flow. The Developer is proposing participation in upgrades to the Route 100 Regional WWTP facility that will trigger the Phase 3 expansion of the WWTP. A review of the capacity within the downstream collection and conveyance system is required to determine the extent of improvements necessary to accept the proposed sewage flow. Preliminary Subdivision/Land Development Plans were submitted to ARRO and are currently under review. The Plans call for 375 mixed Single Family, Twin and Triple units and a Community Center to be built in the subdivision. The subdivision will connect to the Reserve at Eagle by way of Prescott Drive and to the Reserve at Chester Springs by way of Radek Court. The sanitary sewer disposal requirements are calculated to be 62,675 gpd. On-site drip disposal capacity is calculated to be 42,643 gpd, and the off-site sewage disposal requirement is 20,032 gpd. The combination gravity and low-pressure sanitary sewer systems will be directed to the Reserve at Eagle Pump Station No. 1 off Prescott Drive. Preliminary Subdivision/Land Development Plans were submitted and reviewed by ARRO. ARRO comments were submitted in an April 10, 2017 letter to the Township. ARRO is in the process of reviewing the June 15, 2017 resubmission of the Preliminary Subdivision/Land Development Application. ARRO reviewed the June 15, 2017 resubmission of the Preliminary Subdivision/Land Development Plan and submitted comments to the plan in a July 10, 2017 letter to the Township. ARRO also reviewed the subdivision's low-pressure sewer system design calculations and submitted comments to the design in a July 12, 2017 letter to the Township. ARRO reviewed an August 1, 2017 revision to the low-pressure sewer system design calculations and drawings and submitted an August 16, 2017 letter to the Township with comments to the revision materials. ARRO has started an evaluation of the Reserve at Eagle Pump Station No. 1 to ascertain its capability to accept the Fetter Tract design sanitary sewer disposal

requirements. ARRO received revised Preliminary Subdivision/Land Development Plans on September 14, 2017. ARRO reviewed the Plans and sent an October 3, 2017 review comments letter to the Township. ARRO continues an evaluation of the Reserve at Eagle Pump Station No. 1 to ascertain its capability to accept the Fetter Tract design sanitary sewer disposal requirements. The evaluation is substantially complete with the exception of emergency generator assessment. ARRO continues an evaluation of Upland Farms drip disposal to ascertain the facility's capability to store and dispose the Fetter Tract effluent. ARRO reviewed the Sewage Facilities Planning Module (SFPM) and is working on the sanitary sewer review. The Authority Administrator signed the SFPM Component 3 Sections G and J. The Board of Supervisors approved the SFPM resolution at the April 16, 2018 meeting. The developer's engineer stated in an April 17 email to the Authority Administrator that the SFMP is close to being submitted to PADEP for review. The Sewage Facilities Planning Module was sent to PADEP on April 18, 2018. Ebert Engineering requested Authority assistance in preparation of a response to comments received from PADEP on the Sewage Facilities Planning Module. ARRO is working on a response. ARRO assisted Ebert Engineering in preparation of letter responses to comments received from PADEP to the Sewage Facilities Planning Module. ARRO transmitted its responses to Ebert Engineering on November 1, 2018. ARRO in association with Ebert Engineering prepared a December 13, 2018 letter to PADEP in response to PADEP Sewage Facilities Planning Module comments. ARRO reviewed the Water Quality Management Part II Permit application, dated July 23, 2019 as submitted by Ebert Engineering on July 26, 2019, along with the supporting design reports for the low-pressure sewer system and the upgrades to the Reserve at Eagle Pump Station No.1. ARRO sent comments to Ebert Engineering by email dated August 13, 2019. Ebert subsequently revised its documents based on ARRO comments and resubmitted the documents. ARRO is currently reviewing the revised documents. ARRO reviewed the latest revised Water Quality Management Part II Permit application package received August 21, 2019 from Ebert Engineering. ARRO has no further comments to Ebert's permit application, only ARRO comments remain to be addressed on E. B. Walsh's land development drawings regarding the lining of low-pressure force main discharge manholes. Ebert Engineering sent to PADEP the WQM Part II Permit Application package by transmittal letter dated October 3, 2019. On October 15, 2019 ARRO received from E. B. Walsh the latest Subdivision and Land Development Plan drawings entitled "The Preserve at Marsh Creek" along with a response letter to previous plan review comments. ARRO will review and comment on the sanitary sewer portion of the latest drawings. ARRO reviewed and on November 1, 2019 issued comments to the Phases 1 and 1A sanitary sewer escrow calculations as submitted by the McKee Group. McKee Group issued revised escrow calculations on November 15, 2019 in response to ARRO comments. The Preserve at Marsh Creek preconstruction meeting was held on December 4, 2019. Site survey and erosion control measures work will be starting within two weeks. ARRO has requested a schedule of sanitary sewer installation work from the site contractor. PADEP issued the WQM permit, dated November 25, 2019, for the low-pressure sanitary sewer with individual grinder pumps and for the upgrade to the Reserve at Eagle Pump Station No. 1 required as part of the project. McKee Group held a February 5, 2020 meeting with its engineers and contractor. Discussions included forthcoming designs for the piping between the Preserve drip fields and Upland Farms pump station, revisions to gravity sanitary sewer around Reserve at Eagle PS #1, and the Route 100 Regional WWTP Phase III expansion. McKee expects submission of the Phase III expansion design around May 2020, not March 2020 as stipulated in the Agreement for Expansion of the Route 100 Central WWTP. ARRO had a February 12, 2020 meeting with Keystone Engineering at the Reserve at Eagle PS #1 to discuss electrical revisions to the station in support of the upgrade necessary to carry McKee flows. ARRO continues reviewing the project's sanitary sewer materials shop drawings. Site contractor construction schedule shows start of sanitary sewer installation as the last week of February 2020. Site contractor started sanitary sewer installation on March 4, 2020. Site contractor suspended sanitary sewer installation work due to coronavirus restrictions. On May 1, 2020 Ebert Engineering submitted initial plans for the Reserve at Eagle Pump Station Upgrade. ARRO transmitted a May 12, 2020 email to Ebert Engineering with review comments to Reserve at Eagle Pump Station Upgrade plans. ARRO received an email from Ebert Engineering that the initial submission of the Upland Farms drip pump station upgrade and Fetter's site drip field design would be submitted during the week of May 25. On June 12, 2020 ARRO received from Ebert

Engineering the initial submission of the Feters Tract Drip Disposal System Part II WQM Permit Application, Design Engineer's Report and Drip Disposal System design drawings issued for WQM review. ARRO is in the process of reviewing the documents. ARRO reviewed E. B. Walsh Utility Coordination drawings and Ebert Engineering revised low pressure sewer system drawings and issued June 17, 2020 comments to each drawing set. On June 25, 2020 Ebert Engineering submitted to ARRO for review and comments a revised Fetter Drip Disposal System design that removed the Drip Filter Building, along with a revised WQM Part 2 Permit Application and Design Engineers Report. ARRO transmitted comments on the documents to Ebert Engineering by email dated July 2, 2020. On July 15, 2020 E. B. Walsh submitted a revised Utility Coordination plan set to address previous ARRO comments. The plan set was primarily developed to coordinate information contained on various plans prepared by Ebert Engineering and the E. B. Walsh offices. ARRO is in the process of reviewing the revised plan set. On July 21, 2020 Ebert Engineering submitted revised plans for the Reserve at Eagle Pump Station Upgrade. ARRO is in the process of reviewing the revised plans. Gravity sanitary sewer installation continues, while low pressure sewer system shop drawings were submitted and reviewed in early August 2020. On July 24, 2020 Ebert Engineering submitted to ARRO for review and comments a revised Fetter Drip Disposal System design along with a revised WQM Part 2 Permit Application and Design Engineers Report. ARRO is in the process of reviewing the revised documents. On July 21, 2020 Ebert Engineering submitted revised plans for the Reserve at Eagle Pump Station Upgrade. ARRO reviewed the revised plans. ARRO transmitted an August 19, 2020 email to Ebert Engineering stating it had no further comments to the plans. ARRO transmitted a September 4, 2020 email to Ebert Engineering with review comments to the revised Fetter Drip Disposal System design along with the revised WQM Part 2 Permit Application and Design Engineers Report. ARRO submitted September 2, 2020 comments to the Ebert Engineering drawings of the rerouted Reserve at Eagle PS #1 force main around existing Manhole #500 necessary to facilitate the installation of new gravity sewer between the manhole and the pump station wetwell. The drawings were subsequently revised and approved by ARRO. Sanitary sewer and force main work at the Reserve at Eagle PS #1 was completed and tested. All sanitary sewer was completed and tested between the Reserve at Eagle PS #1 and the Toll/McKee model homes. House service lines at the four McKee model homes and the two Toll Brothers model homes were completed and tested. ARRO reviewed the revised Feters Drip Disposal WQM application, design engineer's report and drawings submitted by Ebert Engineering on November 8, 2020 and has no further comments to the documents. On January 8, 2021 the Authority Administrator signed the Feters Tract Drip Disposal WQM permit application on behalf of the Authority. Ebert Engineering will electronically submit the permit application documents to PADEP the week of January 18, 2021. Ebert Engineering submitted the WQM permit application documents to PADEP by transmittal letter dated January 25, 2021. ARRO reviewed Phase 1 sanitary sewer escrow release No. 1 and prepared a February 24, 2021 letter to the Township approving the quantities and the escrow release's requested amount of \$669,462.83. Work continues on installation and testing of gravity and low-pressure sewer system mains. On July 1, 2021, McKee transmitted Phase 1 sanitary sewer escrow release No. 2 request to ARRO. ARRO is in the process of reviewing the request. After reviewing McKee's Phase 1 sanitary sewer escrow release No. 2 request, ARRO prepared a list of items to complete based on ARRO RPR records. ARRO also prepared an August 17, 2021 letter to the Township recommending withholding \$19,721.85 to cover the costs to complete the work items in the list and finding acceptable the release of \$207,270.85 to McKee.

Installation of the gravity house service line to each new home continues as required.

Greenridge

Open Community Adaptive Reuse Development (OCARD): On August 1, 2017 a meeting with the Developer was held at the Township to discuss the sanitary sewer options for the redevelopment of the former Upattina School parcel (Open Community Adaptive Reuse Development, a.k.a OCARD). ARRO is reviewing a revised Section H of the Sewage Facilities Planning Module submitted by the Developer on August 8, 2017. ARRO reviewed a revised Sewage Facilities Planning Module Section

H submitted by the Open Community Developer. The Sewage Facilities Planning Module (SFPM) now includes the revised Section H, and the Component 4 submissions have been forwarded to Chester County's Planning Commission and Health Department. ARRO conducted a site visit to a property which utilizes an Ecoflow unit similar to that proposed for on-site wastewater pre-treatment at the Open Community project. Chester County Planning Commission and Health Department returned the Open Community Components 4A, 4B and 4C. Component 3 Sections G and J were completed. The Township authorized sending the SFPM package to PADEP for review. The Authority Administrator prepared a March 14, 2018 letter to Warwick Land Development stating the Authority continues to lack sufficient information from Warwick before the Authority could agree to operate the pretreatment facility proposed for the Open Community Adaptive Reuse Development. On behalf of the Open Community Developer, on November 13, 2018 Boucher & James submitted sewer connection plans for review. ARRO is in the process of reviewing the plans and will issue comments in a separate letter. ARRO completed its review of the November 13, 2018 Boucher & James sewer connection plans and issued a November 28, 2018 comments letter to the Township. Subsequently, Boucher & James submitted to ARRO a response email on December 3, 2018 along with revised plans, last dated December 3, 2018. ARRO is reviewing the email responses and the latest revised plans. On February 25, 2019 PADEP released the WQM permit for the Open Community Adaptive Reuse Project. On March 12, 2019 the Township received a sewer permit application from the Developer. ARRO is setting up a pre-construction meeting for the Open Community Adaptive Reuse Project. On April 25, 2019 ARRO conducted a pre-construction meeting for the Open Community project. The Developer will attempt to use the existing lateral connection installed during the original Greenridge sanitary sewer installation work done in 2005. The Developer excavated a test hole at the existing Greenridge subdivision lateral connection. ARRO was informed by the Developer that elevations were taken and submitted to Boucher & James. The lateral will be used. New plans for connection to the existing lateral will be prepared and submitted to the Authority and ARRO for review. ARRO sent a September 17, 2019 email to the Developer requesting a project update for the sanitary sewer portion of the Open Community Adaptive Reuse Project. On October 15, 2019 ARRO received an email from the Developer with a project update stating bids have been awarded for the sanitary sewer portion of the Open Community Adaptive Reuse Project. Developer also indicated construction is tentatively scheduled for mid-December 2019. ARRO reviewed the latest sanitary sewer connection plan drawings, dated December 19, 2019. ARRO also reviewed some project sanitary sewer shop drawings. On January 16, 2020 ARRO submitted to the Developer comments to both items. ARRO is reviewing the latest revision to the OCARD land development plans, dated February 14, 2020, and additional shop drawings. ARRO completed reviewing the latest revision to the OCARD land development plans, dated February 14, 2020. ARRO sent an April 2, 2020 email to the Developer's engineer stating it had no further comments to the plans. By letter dated June 15, 2020 the Developer's engineer submitted final sanitary sewer system drawings. Construction of the onsite sewer piping started the week of June 15, 2020. ARRO prepared a June 19, 2020 letter accepting the final sanitary sewer design. The developer sent a July 21, 2020 email to ARRO stating they have submitted building construction permit applications for Greenridge Hall units and are awaiting permit issuance before continuing sanitary sewer installation. The email also said sanitary tanks and treatment units have been ordered. On August 19, 2020 ARRO requested the developer submit an updated project construction schedule. On September 16, 2020 ARRO again requested the developer submit an updated project construction schedule. On September 16, 2020 ARRO again requested the developer submit an updated project construction schedule.

On September 17, 2020 ARRO received an email from the developer's counsel in reply to the ARRO request for a construction schedule. Counsel wrote it would discuss the matter with the developer and one would return a response, which has yet to be received as of October 20, 2021.

Meadow Creek Sewer Extension to Greenridge WWTP: At the request of the Authority Administrator ARRO prepared March 16, 2020 sketch plans and opinions of probable construction costs to extend Meadow Creek sanitary sewer to the Greenridge WWTP. ARRO is studying the

retirement of the Meadow Creek WWTP by starting a study to determine what upgrades are needed at Greenridge WWTP in order to accept flow from Meadow Creek. ARRO also initiated a preliminary design for a pump station and force main system to convey Meadow Creek flow to Greenridge WWTP. ARRO continues the plans for decommissioning the Meadow Creek WWTP, continues preliminary pump station and force main design to convey sewage to the Greenridge WWTP, and continues the study of the Greenridge WWTP to determine what upgrades are needed to accept Meadow Creek flow.

ARRO continues the plans for decommissioning the Meadow Creek WWTP, continues preliminary pump station and force main design to convey sewage to the Greenridge WWTP, and continues the study of the Greenridge WWTP to determine what upgrades are needed to accept Meadow Creek flow.

Jankowski (Chester Springs Crossing)

ARRO issued a May 5, 2017 review letter to the Township with comments to the September 13, 2016 Conditional Use Plan for the Jankowski Tract. On February 2, 2018, the Developer's engineer submitted for review subdivision plans of a 55 Single Family Housing unit community. ARRO is working on a review of the sanitary sewer portion of the subdivision plans. ARRO completed its review of the Preliminary/Final Subdivision-Land Development Plan submitted by E. B. Walsh and prepared a February 26, 2018 letter to the Township with comments to the Plans. ARRO responded to Toll Brothers regarding the Windsor Ridge Pump Station capacity to receive Jankowski estimated sanitary flow. ARRO reviewed the Preliminary/Final Subdivision-Land Development Plan, last revised May 18, 2018, and prepared June 11, 2018 comments to the Township. Sewage Facilities Planning Module Components 4A, 4B and 4C were received. Presently the project is in the 30-day Public Notice periods, which upon completion the Township can submit the components to PADEP. The Authority Administrator sent an August 14, 2018 letter to Chester County Health Department (CCHD) regarding CCHD's Component 4C comment about malfunctions along Surrey Lane, Font Road and Carriage Drive. The Administrator stated the Authority will be evaluating future extensions in these areas. Subsequently, ARRO conducted a small conceptual planning study to sewer these areas. ARRO presented three sewer extension options and cost opinions to the Authority Administrator for review and comment. The first gravity and low-pressure sewer concept sends all flow through the Jankowski tract, the second all-gravity sewer concept sends some flow through Jankowski and the remainder to Reserve at Eagle, while the third all gravity sewer concept sends all flow to the Reserve at Eagle. ARRO is reviewing the latest Preliminary/Final Subdivision Land Development Plan transmitted by E.B. Walsh letter, dated August 10, 2018. SFPM Components 4A, 4B and 4C were received, but the bog turtle clearance letter from PA Fish & Wildlife is still outstanding. The UUT Board of Supervisors authorized the resolution needed for the Sewage Facilities Planning Module at their October 15, 2018 meeting but are holding it until the clearance letter is issued. ARRO prepared an August 30, 2018 sanitary sewer review letter to the latest Preliminary/Final Subdivision-Land Development Plan transmitted by E.B. Walsh letter, dated August 10, 2018. On February 4, 2019, ARRO received the preliminary sanitary sewer escrow calculations from Toll Brothers. ARRO reviewed the calculations and returned comments to Toll. Revised calculations were received and after review were accepted by ARRO. ARRO prepared and sent a letter to the Township recommending acceptance of the sanitary escrow in the amount of \$425,955.60. On February 27, 2019 ARRO received from E. B. Walsh updated Preliminary/Final Subdivision Land Development Plans. ARRO reviewed the sanitary sewer portion of the drawings and transmitted comments to E. B. Walsh by letter dated March 11, 2019. On March 18, 2019 ARRO received from E. B. Walsh updated Preliminary/Final Subdivision Land Development Plans. ARRO reviewed the sanitary sewer portion of the drawings and transmitted comments to E. B. Walsh by email dated April 1, 2019. On April 2, 2019 ARRO received from Toll Brothers a revised sanitary sewer escrow calculation based on the latest E. B. Walsh drawings. ARRO prepared an April 2 letter to the Township recommending accepting the revised escrow amount. ARRO received a May 22, 2019 email from Toll Brothers stating Jankowski construction might start in July 2019. A pre-construction meeting for the project has been scheduled for July 24, 2019. ARRO

attended the July 24, 2019 pre-construction meeting and the August 21, 2019 PennDOT HOP site meeting. Sanitary sewer installation for the project is set to begin on August 26, 2019 starting offsite in Windsor Ridge's Garrison Drive. Sanitary sewer installation for the project began on August 26, 2019 starting offsite in Windsor Ridge's Garrison Drive. Garrison Drive sanitary sewer installation is almost complete and the contractor intends to continue its work in the Jankowski site. The boring for the sanitary sewer casing under Route 100 linking Jankowski and Windsor Ridge will take place sometime in October 2019. The sanitary sewer casing boring under Route 100 linking Jankowski and Windsor Ridge is scheduled for the week of October 28, 2019. The boring and casing work under Route 100 was completed the week of November 18, 2019. In order to correct a sewer misalignment through the casing Toll Brothers agreed to install two new manholes, one upstream and one downstream of the casing, and also relocate a recently installed manhole to achieve minimum sewer slope required by PADEP. Sanitary sewer installation continues within the site. Over the weeks of January 6 through January 13, 2020 two new manholes, one upstream and one downstream of the casing, were installed and one existing manhole in Garrison Drive was relocated to achieve minimum sewer slope required by PADEP. Sanitary sewer installation still continues within the site. Testing of sanitary sewer through Milford Road Extension, across Route 100 and in Windsor Ridge's Garrison Drive started the last week of January 2020 and continued into early February; all testing was positive. Installation of the gravity house service line to each new home has resumed the week of May 18, 2020. Testing of the onsite sanitary sewer continued the week of June 15, 2020. Testing of all onsite sanitary sewer was completed. Sanitary sewer televising was completed and submitted to ARRO for review and comment. ARRO reviewed the sanitary sewer televising submitted by the contractor and is preparing comments.

Installation of the gravity house service line to each new home continues.

Lakeridge

ARRO is preparing an evaluation of the wastewater plant and sanitary sewer to assess the feasibility of connecting six (6) homes along Moore Road to the sanitary sewer system. ARRO completed its evaluation of the wastewater plant and sanitary sewer. The wastewater plant has sufficient capacity, but an extension to the existing Moore Road sanitary sewer will need to be constructed. Ivystone subdivision sanitary sewer cleaning and televising will be done on Monday, January 25, 2021 to check the condition of the sewers. The Ivystone subdivision sanitary sewer cleaning and televising was done on Monday, January 25, 2021. Two sections of sewer where the paving surface above the sewer trench has dishd did show a few areas of sag in the piping, but the sags were minor in nature and not considered to have caused the paving irregularity.

Nothing new to report.

Marsh Harbour

Nothing new to report.

Reserve at Eagle

Nothing new to report.

Route 100 WWTP

ARRO conducted a study to search for new disposal sites within and near the Township. Mapping was developed for the study and ARRO conducted a preliminary assessment of a potential stream discharge for the WWTP. ARRO presented its findings regarding potential disposal sites at the December 2016 Board meeting. ARRO has prepared a draft of the Route 100 Regional WWTP disposal fields study for the potential to rerate the fields for additional capacity. ARRO engaged a sub-consultant to review the existing disposal field design records, the Route 100 WWTP SBR discharge limits and ARRO study findings. ARRO received the sub-consultant's report and is reviewing the findings. ARRO prepared a revised Route 100 Regional WWTP allocated treatment and disposal

capacity summary. Based on an ARRO search and mapping study conducted in late 2016 for new disposal sites within and near the Township ARRO is evaluating a parcel on South Chester Springs Road to propose how the land could be subdivided and will be preparing an estimate of disposal capacity that would be available in the subdivided areas. ARRO evaluated a parcel on South Chester Springs Road to propose how the land could be subdivided and prepared an estimate of disposal capacity that would be available in the subdivided areas. ARRO found two potential 18-acre drip field areas on the parcel each with an average estimated capacity of 100,000 gallons per day. ARRO has initiated preliminary layout design for two potential 18-acre drip fields on the South Chester Springs Road parcel (the Bennett property).

Nothing new to report.

ARRO submitted the Act 537 Planning Grant Application to the Pennsylvania Department of Community and Economic Development on May 23, 2019. ARRO received correspondence from the Pennsylvania Department of Community and Economic Development that they will consider the UUT Act 537 Planning Grant Application at their September 17, 2019 Commonwealth Financing Authority (CFA) Board meeting. The CFA posted its September 17, 2019 meeting grant award list and Upper Uwchlan Township was awarded the \$32,610 grant as requested on the Act 537 Planning Grant application. The UUTMA Act 537 Planning Project is awaiting the grant award documentation and agreement from CFA, which needs to be processed and signed before ARRO can move ahead with the planning. The UUTMA Act 537 Planning Project grant award documentation and agreement from CFA was signed. ARRO has started some basic planning work by reviewing past 537 Planning documents and township demographics. ARRO submitted the 2020 Route 100 Regional WWTP groundwater monitoring report to PADEP on June 19, 2020. The Authority Administrator and ARRO met on January 20, 2021 to discuss various alternatives in connection with ARRO's Act 537 planning work. The Authority Administrator and ARRO met on January 20, 2021 to discuss various alternatives in connection with ARRO's Act 537 planning work. As a follow-up to the January 20, 2021 meeting, ARRO is completing planning level studies of the various discussed alternatives, which will then be incorporated into the final planning document. At the Authority's March 2021 meeting ARRO is preparing to do a short presentation of the Act 537 planning Executive Summary. At the March 2021 Authority meeting ARRO provided the Authority with hard and electronic copies of the draft Act 537 Plan for review and ARRO is now awaiting comments from the Authority. The Act 537 Plan is ready to be sent to Chester County. ARRO went to the August 2021 Township Planning Commission meeting and received comments from the Commission to the Act 537 Plan. ARRO is in the process of preparing responses to these comments and revising the Plan based on the comments. ARRO has yet to receive comments to the Plan from the Chester County Planning Commission and the Chester County Health Department. ARRO prepared and submitted responses to the Township Planning Commission comments. ARRO will meet with the Township Planning Commission at its October meeting. The Chester County Planning Commission submitted a letter to ARRO that the draft Plan was consistent with the County's Comprehensive Plan. The Chester County Health Department has yet to provide a review letter or comments to the draft Plan. ARRO completed drive-by field confirmations of the returned OLDS surveys, but continues to place a hold on completing the in-person field verifications due to COVID-19 concerns.

ARRO met with the Township Planning Commission at its October 2021 meeting, reviewed their comments on the Act 537 Plan, and provided further description relative to ARRO responses to the Commission's comments. Chester County Health Department submitted a review letter with one comment, primarily for minor verbiage clarification. The next step will be to prepare the Plan for public review and comment. Also, at the end of September 2021, ARRO submitted the Plan's quarterly status update to PADEP.

Route 100 WWTP – Phase III

ARRO is reviewing the Route 100 Regional WWTP pad-mounted transformer's capacity in planning for the Phase III of the WWTP expansion. On February 12, 2018, ARRO met with a PECO representative

at the WWTP to inspect the capacity of the WWTP's existing transformer and review the Phase III project. After ARRO reviewed the transformer data provided by PECO along with additional anticipated Phase III loadings ARRO concluded that the existing transformer will need to be upgraded. On May 3, 2018 ARRO completed a preliminary cost opinion for the Phase III construction. ARRO responded to February 28, 2020 questions from Ebert Engineering regarding the design of the Phase III precast tanks and the SBR treatment system. ARRO reviewed the initial Aqua-Aerobics Phase III Process Design Report and submitted April 3, 2020 comments to Ebert Engineering on the report. Subsequently Ebert Engineering submitted an updated Process Design Report to ARRO, which ARRO is in the process of reviewing. ARRO received a June 9 email from Ebert Engineering that the initial submission of Route 100 Regional WWTP Phase III design documents would be submitted the week of June 22. ARRO received a July 17, 2020 email from Ebert Engineering that Dutchland is proposing to use the common wall design for the two new SBR basins. On July 24, 2020 ARRO received from Ebert Engineering a WQM Part 2 permit application and upgrade design drawings for the Route 100 Regional WWTP Phase III project. ARRO is in the process of reviewing the documents. On August 20, 2020 ARRO transmitted to Ebert Engineering comments to the Route 100 Regional WWTP Phase III WQM Part 2 permit application and upgrade design drawings. ARRO completed review of Ebert Engineering's revised Route 100 Regional WWTP Phase III WQM Part 2 permit application with revised upgrade design drawings transmitted November 4, 2020. On December 16, 2020 ARRO transmitted comments on the documents to Ebert Engineering. ARRO completed a review of Ebert Engineering's further revised Route 100 Regional WWTP Phase III WQM permit application design documents and had no further comments to the application. On January 8, 2021 the Authority Administrator signed the permit application on behalf of the Authority. Ebert Engineering will electronically submit the permit application documents to PADEP the week of January 18, 2021. Ebert Engineering submitted the WQM permit application documents to PADEP by transmittal letter dated January 25, 2021. Keystone Engineering has started the Route 100 Regional WWTP Phase III electrical design. ARRO met a Keystone electrical engineer at the WWTP to review the existing electrical equipment. On April 21, 2021 ARRO was informed by Ebert Engineering that the Route 100 Regional WWTP Phase III electrical design will be submitted for review and comment the week of April 26, 2021. On May 11, 2021, ARRO received from Ebert Engineering the Route 100 Regional WWTP Phase III electrical design. ARRO has started a review of the design. On June 14, 2021, ARRO received the draft Phase III final design technical specifications and drawings from Ebert Engineering for review and comment. ARRO reviewed the draft Phase III final design technical specifications and drawings and on July 21, 2021 transmitted to Ebert Engineering review comments to the documents. The Authority Administrator submitted an August 2, 2021 letter to PADEP committing to use planning-based flow numbers in the draft Act 537 Plan and expand the Plan to address new land disposal capacity. The Authority Administrator and Ebert Engineering had a September 1, 2021 email exchange with PADEP regarding the WQM permit for the Route 100 Regional WWTP Phase III project. PADEP said it would not issue the WQM permit for the full 0.800 MGD, but would limit the WQM permit to 0.600 MGD. However, PADEP could issue the permit to allow construction of the final two SBR tanks with the caveat that only three of the four SBRs can be operational at any one time. A draft copy of the permit was received by Ebert Engineering the week of September 13, 2021 and was forwarded to the Authority Administrator for review by ARRO.

ARRO reviewed the draft copy of the Phase III WQM permit and prepared comments to the Authority Administrator. The ARRO comments were incorporated into a draft letter on Authority letterhead. The letter was submitted to PADEP for use as the basis for discussion in a September 29, 2021 video conference with the Authority Administrator, PADEP, Ebert Engineering and ARRO in an effort to expedite the issuance of a final permit.

Saybrooke

ARRO prepared the 2021 annual groundwater monitoring report and on June 28 transmitted the document to PADEP.

ARRO has started to prepare the 5-Year Comprehensive Groundwater Monitoring Report, which will be included with the 2021 WQM permit renewal application being prepared by Clean Water.

St. Andrews Brae

Nothing new to report.

Upland Farms

ARRO is preparing plans and specifications for a low-pressure grinder pump and force main for the Barn Renovation project. ARRO estimated the purchase of 1 EDU would be required for the barn's intended uses. ARRO is attempting to obtain from PADEP a planning module exemption for the proposed barn sewer connection. ARRO received a November 19, 2020 letter from PADEP stating no planning modules need to be submitted for the proposed barn sewer connection. ARRO is working with the Township's project manager (Boyle Construction) for the sanitary sewer portion of the project. The Upland Farms Barn Renovation Sanitary Sewer Connection project is out for bids. A pre-bid meeting is scheduled for March 22, 2021 with bids due April 1, 2021. The Upland Farms Barn Renovation Sanitary Sewer Connection project bids were received. The Township is handling the project. A survey was completed and stakes set along the boundary line between the Waynebrook subdivision and Upland Farms Drip Fields "A" and "B". The site contractor has completed the installation of the barn and farm house site sanitary sewer piping. The grinder pump and its force main are installed. The contractor is waiting on the barn's new electrical system to be completed and energized in order to conduct the grinder pump start-up testing.

Nothing new to report.

Waynebrook

Nothing new to report.

Windsor Ridge

Nothing new to report.

Miscellaneous

Active Adult Community, 100 Greenridge Road – On January 7, 2021 the Authority Administrator and ARRO met with a developer to discuss the sanitary aspects for a potential 78 ea. lot active adult community situated over a 58.94-acre total site area at 100 Greenridge Road. A sketch of the proposed site and a ChescoViews satellite image of the site is attached to the January 20, 2021 Project Status Report. On June 4, 2021 the Authority Administrator and ARRO met with Toll Brothers regarding this project. ARRO reviewed the project's conditional use application and prepared a September 7, 2021 letter to the Township. The Developer is proposing 64 single-family lots with a required sanitary sewer capacity of 14,400 gallons per day. The proposed subdivision will be serviced by the Route 100 Regional WWTP with drip field irrigation disposal to be offered for dedication to the Township.

Nothing new to report.

Village of Eagle

Byers Road Sanitary Sewer Extension - ARRO preliminary planning for sanitary sewer along Byers Road between Pottstown Pike and Senn Drive was submitted to the Authority Administrator for review and comment. ARRO is preparing the Sewage Facilities Planning Module Component 3M for the sanitary sewer along Byers Road between Pottstown Pike and Senn Drive. ARRO received a completed Component 4A from the Township on October 19, 2017. At the request of the Chester County Health Department, on January 9, 2018, ARRO sent another Sewage Facilities Planning

Module Component 3M letter to CCHD for the sanitary sewer extension along Byers Road between Pottstown Pike and Senn Drive. In February 2018 letters were sent to the property owners who will be connected to the new Byers Road sanitary sewer informing them that the project's survey will be commencing. ARRO is continuing to prepare drawings and construction specifications for the sanitary sewer extension. The project's survey work was completed in early March 2018. ARRO has the survey information for inclusion in the plans. ARRO has the design plans and specifications in the final stage of completion. ARRO submitted the highway occupancy permit to PennDOT on April 16, 2018. There were no public comments to the sewage facilities planning module (SFPM) and the Board of Supervisors passed a resolution approving the submission of the SFPM to PADEP. ARRO submitted the Sewage Facilities Planning Module to PADEP on April 27, 2018. Comments from PADEP are expected within sixty (60) days. PennDOT has approved the highway occupancy permit plans and requires payment of \$810 for inspection observation prior to release of the permit. PADEP transmitted its comments to the Sewage Facilities Planning Module by letter dated June 21, 2018. ARRO is in the process of addressing each of the PADEP comments. The PennDOT Highway Occupancy Permit for the project has been received. ARRO submitted an August 6, 2018 letter to PADEP addressing each PADEP comment from its Sewage Facilities Planning Module review letter, dated June 21, 2018. PADEP transmitted a September 5, 2018 letter with additional comments to Sewage Facilities Planning Module. ARRO submitted a response letter addressing each concern on October 17, 2018. PADEP transmitted a November 14, 2018 letter with additional comments to the Sewage Facilities Planning Module. ARRO is reviewing the letter and will address each comment in a future letter. The Authority Administrator sent a December 20, 2018 letter to PADEP containing responses to PADEP's November 14, 2018 comments to the Sewage Facilities Planning Module. ARRO sent an email to PADEP on January 31, 2019 requesting approval of the Byers Road Sanitary Sewer Extension Sewage Facilities Planning Module. As of March 20, 2019, no response has been forthcoming from PADEP. ARRO is proceeding with preparation of finishing plans and specifications for the bidding of the project. Regarding the Byers Road Sanitary Sewer Extension SFPM and the December 20, 2018 letter sent by the Authority to PADEP, PADEP responded with an April 5, 2019 letter to the Township. PADEP said the December letter did not sufficiently address all of PADEP's concerns with sewage disposal needs identification in the project area. PADEP wants the needs identification submitted by September 3, 2019. ARRO prepared letters that were delivered to property owners in the Byers Road sewer area inviting them to the April 23, 2019 Authority meeting to be held at the Pickering Valley Elementary School. ARRO submitted documents to PennDOT to extend the Byers Road HOP to July 10, 2020 and was granted the extension by PennDOT. At the request of PADEP, on September 26, 2019 ARRO submitted to PADEP a study and \$522,000 cost opinion for potentially providing sewer service to an additional sixteen (16) lots east of the proposed Byers Road Sanitary Sewer Extension terminal manhole. PADEP responded that they will review the study information. ARRO has started preparing a sanitary sewer grant application under the Pennsylvania Department of Community & Economic Development (DCED) H2O PA grant program for the Byers Road Sanitary Sewer Extension project. By letter dated November 7, 2019 PADEP issued Byers Road Sanitary Sewer Extension SFPM approval. ARRO is continuing to prepare and will submit a sanitary sewer grant application under the DCED H2O PA grant program for the Byers Road Sanitary Sewer Extension project. The Byers Road grant application was submitted on December 12, 2019. Action on the application is not expected until May or June 2020. ARRO received a June 12, 2020 email from DCED that the grant application will not be reviewed until September 2020; however, they wanted a timeline for the project after September, which ARRO prepared and submitted. ARRO prepared a PennDOT HOP permit extension for the project. Under Authority letterhead ARRO prepared a July 2020 communication to property owners to be connected to the proposed sanitary sewer extension notifying them of the tentative project schedule. DCED awarded a \$463,000 grant for the Byers Road Sanitary Sewer Extension project. On July 28, 2020 the Township mailed letters to property owners to be connected to the proposed sanitary sewer extension notifying them of the tentative project schedule. ARRO is in communication with DCED regarding proceeding to the bid phase of the project. The DCED grant agreement has been signed. ARRO contacted DCED and they have no issues with bidding the Route 100 sewer crossing as an

alternate. Project bid advertising is tentatively set for December 2020 with a January 2021 bid opening. The Byers Road Sanitary Sewer Extension project was first advertised on December 14, 2020 with a second advertisement set for December 21, 2020. A pre-bid meeting is scheduled for January 5, 2021 and bids are due January 15, 2021. Six bids for the Byers Road Sanitary Sewer Extension project were submitted on January 15, 2021. The apparent low bidder is Highway Materials, Inc. with a Total Extended bid of \$637,504.30, which includes the cost of the Alternate "A" - Sewer Extension Across Route 100. ARRO is in the process of reviewing the bids. As DCED grant funding is involved approvals are subject to DCED concurrent approval. The notice of intent to award and other contract documents have been sent to Highway Materials for execution. ARRO is awaiting return of the executed documents along with bonds and insurance. ARRO reviewed and approved the bonds and insurance documents submitted by the contractor. ARRO recommends the Authority execute the Agreement, after which ARRO will schedule the project preconstruction meeting. ARRO reviewed a land development plan for 164 Byers Road., which specifies a connection to the Byers Road Sanitary Sewer Extension, but will set up Pump & Haul until the sewer extension is complete. By letter dated April 19, 2021 ARRO issued the Notice to Proceed to Highway Materials. Start of Contract Time will be May 12, 2021 with the project to be substantially completed by September 9, 2021. ARRO will schedule the project preconstruction meeting in early May 2021. On May 13, 2021, ARRO conducted the project preconstruction meeting with Highway Materials. Highway Materials has started to submit its shop drawings to ARRO for review and approval. ARRO prepared a letter informing affected property owners of the upcoming work. ARRO also prepared a letter informing affected property owners of a stake placed in each yard identifying the design location of the property lateral and stating the stake may be relocated by the property owner if desired. Construction is anticipated to start on July 2021. On August 10, 2021, Highway Materials indicated to ARRO that it is having issues obtaining SDR-35 PVC pipe for the project, which is currently in limited supply and its cost has risen substantially. Highway Materials asked if the Authority would accept a not-to-exceed \$7500 change order as half of the increased pipe costs. If the change order is acceptable, they could obtain pipe and start construction in early September 2021. Highway Materials initiated construction the week of September 7th. Much of the trench saw-cutting has been completed and Highway Materials is currently installing sewer and manholes in the area of Eagle Farms Road.

Highway Materials has completed approximately 75 percent of the sewer within Eagle Farms Road.

Portions of the existing 42-inch CMP storm sewer pipe within Eagle Farms Road needed to be exposed for the sanitary sewer main installation; however, the pipe was so badly deteriorated it could not be safely supported during the sanitary sewer main installation, nor could the pipe be removed and replaced after sewer main installation due to its condition. Replacement of the existing 42-inch CMP with 36-inch RCP is proposed. The 36-inch RCP will allow similar flow capacity to the 42-inch CMP and will permit reuse of the existing storm sewer precast concrete structures. The additional cost for replacing 256 LF of storm sewer pipe is \$117,604 or \$459.39/LF. ARRO anticipates this cost will be eligible for 50% funding reimbursement and intends to submit the cost to DCED at the appropriate time. ARRO recommends a change order be granted for the storm sewer work. Additionally, ARRO recommends approving a time extension to late November for substantial completion, with final paving likely delayed until Spring 2022.

ARRO is studying the feasibility of a sewer extension across Route 100 near Byers Road to pick up commercial business on the west side of Route 100. ARRO is proceeding with the design of the sewer extension across Route 100 near Byers Road to pick up commercial business on the west side of Route 100. ARRO is continuing work on a plan to extend the proposed Byers Road sewer across Route 100 to the Eaglepointe shopping center entrance. The sewer extension across Route 100 is included as an alternate to the Byers Road Sanitary Sewer Extension project. The amount bid for the Alternate "A" - Sewer Extension Across Route 100 as submitted by the Byers Road Sanitary Sewer Extension project apparent low bidder, Highway Materials, Inc., was \$89,474.00. ARRO is amending the HOP for the Route 100 crossing. Survey has been completed for the Route 100 crossing.

Surveyors are preparing the legal description and drawing(s) for the temporary and permanent sanitary sewer easements within Eaglepointe's Simpson Drive. Surveyors prepared the legal description and drawing for the temporary and permanent sanitary sewer easements within Eaglepointe's Simpson Drive. The Authority's counsel prepared a draft Deed of Dedication for Sanitary Sewer Easement. ARRO reviewed the draft Deed and in May 2021 transmitted it to J. Loew Property Management for approval. Authority Administrator has discussed the easement situation with J Loew after finding out they are selling Eaglepointe. On July 13, 2021, Highway Materials submitted to ARRO a 52-calendar day contract time extension request due to the inability to procure PVC pipe for the project because of a nationwide PVC resin shortage. The request would revise the Byers Road project substantial completion date from September 9, 2021 to October 31, 2021. ARRO recommends the time extension be approved. ARRO attended a July 29, 2021 meeting with Eagle Retail Associates and the prospective owner of Eaglepointe to discuss the proposed Simpson Drive sanitary sewer easement. Subsequently, on August 2, 2021, Eagle Retail Associates submitted revisions to the Deed of Dedication for Sanitary Sewer Easement prepared by the Authority counsel. The requested revisions are being reviewed and comments prepared. On September 14, 2021 sanitary sewer easement agreement with Eagle Retail Associates was finalized and recorded. Highway Materials started excavation in the easement for the boring under Route 100. The work associate with the boring should be to be completed by the end of the September 2021.

Highway Materials has completed excavation in the Eaglepointe easement and the boring under Route 100.

Milford Farms – ARRO had survey completed on Surrey Lane and Carriage Drive, and on portions of Font Road and Milford Road, as preliminary to the sanitary sewer design for residential homes along these roads. Survey indicated Milford Road gravity sewers would be untenable due to existing grades. ARRO completed a preliminary design for gravity sewer within Surrey Lane, Carriage Drive and the portion of Font Road between Surrey and Carriage. A small wastewater pump station will be needed. The pump station is proposed to be located at the intersection of Font Road and Milford Road and its force main would be connected to an existing force main located in Font Road serving three homes on the Milford Road dead-end. ARRO prepared presentation graphics of the proposed sewer for the Authority Administrator. ARRO prepared letters that were delivered to property owners in the Milford Farms sewer area inviting them to the April 23, 2019 Authority meeting to be held at the Pickering Valley Elementary School. ARRO is proceeding with the preparation of the sanitary sewer design drawings and specifications for project's submission to PADEP. ARRO is creating Milford Road and Byers Road sanitary sewer informational documents for the Township's website. ARRO is reviewing the planning module application and getting it ready for Authority and Township signatures before its submission to PADEP. ARRO submitted the planning module application to PADEP on May 10, 2020. Under Authority letterhead ARRO prepared a July 2020 communication to property owners to be connected to the proposed sanitary sewer extension notifying them of the tentative project schedule. On July 28, 2020 the Township mailed letters to property owners to be connected to the proposed sanitary sewer extension notifying them of the tentative project schedule. ARRO is working on completing the design drawings and specifications for the project. On September 18, 2020 planning module approval was received from PADEP. ARRO is continuing to prepare the WQM Part 2 permit for the proposed pump station as well as the plans and specifications. ARRO intends to soon submit the WQM Part II permit application package to PADEP. A \$500 fee to the Commonwealth of Pennsylvania is required as part of the permit application. ARRO submitted the WQM Part II permit application to PADEP on February 15, 2021. ARRO received the WQM Part II permit from PADEP via email on June 4, 2021.


Nothing new to report.

Township Wastewater Treatment Plant's Monthly Average Flow Charts – Please see the attached.


UPPER UWCHLAN MUNICIPAL AUTHORITY
WASTEWATER TREATMENT PLANTS
MONTHLY AVERAGE DAILY FLOWS

Month - Year		Average Daily Flow (MGD)							Rainfall (in)
		Eaglepointe	Greenridge	Lakeridge	Marsh Harbour	Route 100	Saybrooke	St. Andrews	
Sep-20		0.00930	0.00780	0.02510	0.03830	0.35520	0.00800	0.00110	4.12
Oct-20		0.00950	0.00760	0.02770	0.04120	0.37900	0.00800	0.00190	3.25
Nov-20		0.00920	0.00740	0.02780	0.04230	0.38990	0.00800	0.00260	3.63
Dec-20		0.00740	0.00780	0.02930	0.04500	0.40180	0.00750	0.00250	3.95
Jan-21		0.00930	0.00760	0.02660	0.04460	0.39120	0.00730	0.00260	1.74
Feb-21		0.00900	0.00760	0.02560	0.04190	0.40970	0.00790	0.00280	4.71
Mar-21		0.00810	0.00780	0.02750	0.04270	0.40250	0.00810	0.00270	3.46
Apr-21		0.00700	0.00790	0.02420	0.04040	0.38520	0.00770	0.00250	2.49
May-21		0.00750	0.00770	0.02420	0.03960	0.38400	0.00740	0.00230	3.32
Jun-21		0.00720	0.00770	0.02430	0.03810	0.38210	0.00720	0.00220	2.55
Jul-21		0.00740	0.00760	0.02290	0.03580	0.36390	0.00720	0.00110	5.81
Aug-21		0.00740	0.00770	0.02380	0.03670	0.36290	0.00710	0.00110	6.54
Sep-21		0.00780	0.00790	0.02450	0.03680	0.37500	0.00720	0.00180	6.42
Annual Avg Flow =		0.00807	0.00769	0.02570	0.04043	0.38560	0.00755	0.00218	
Permitted Flow =		0.01500	0.01170	0.04000	0.07600	0.60000	0.00920	0.00360	


Eaglepointe 2020 - 2021

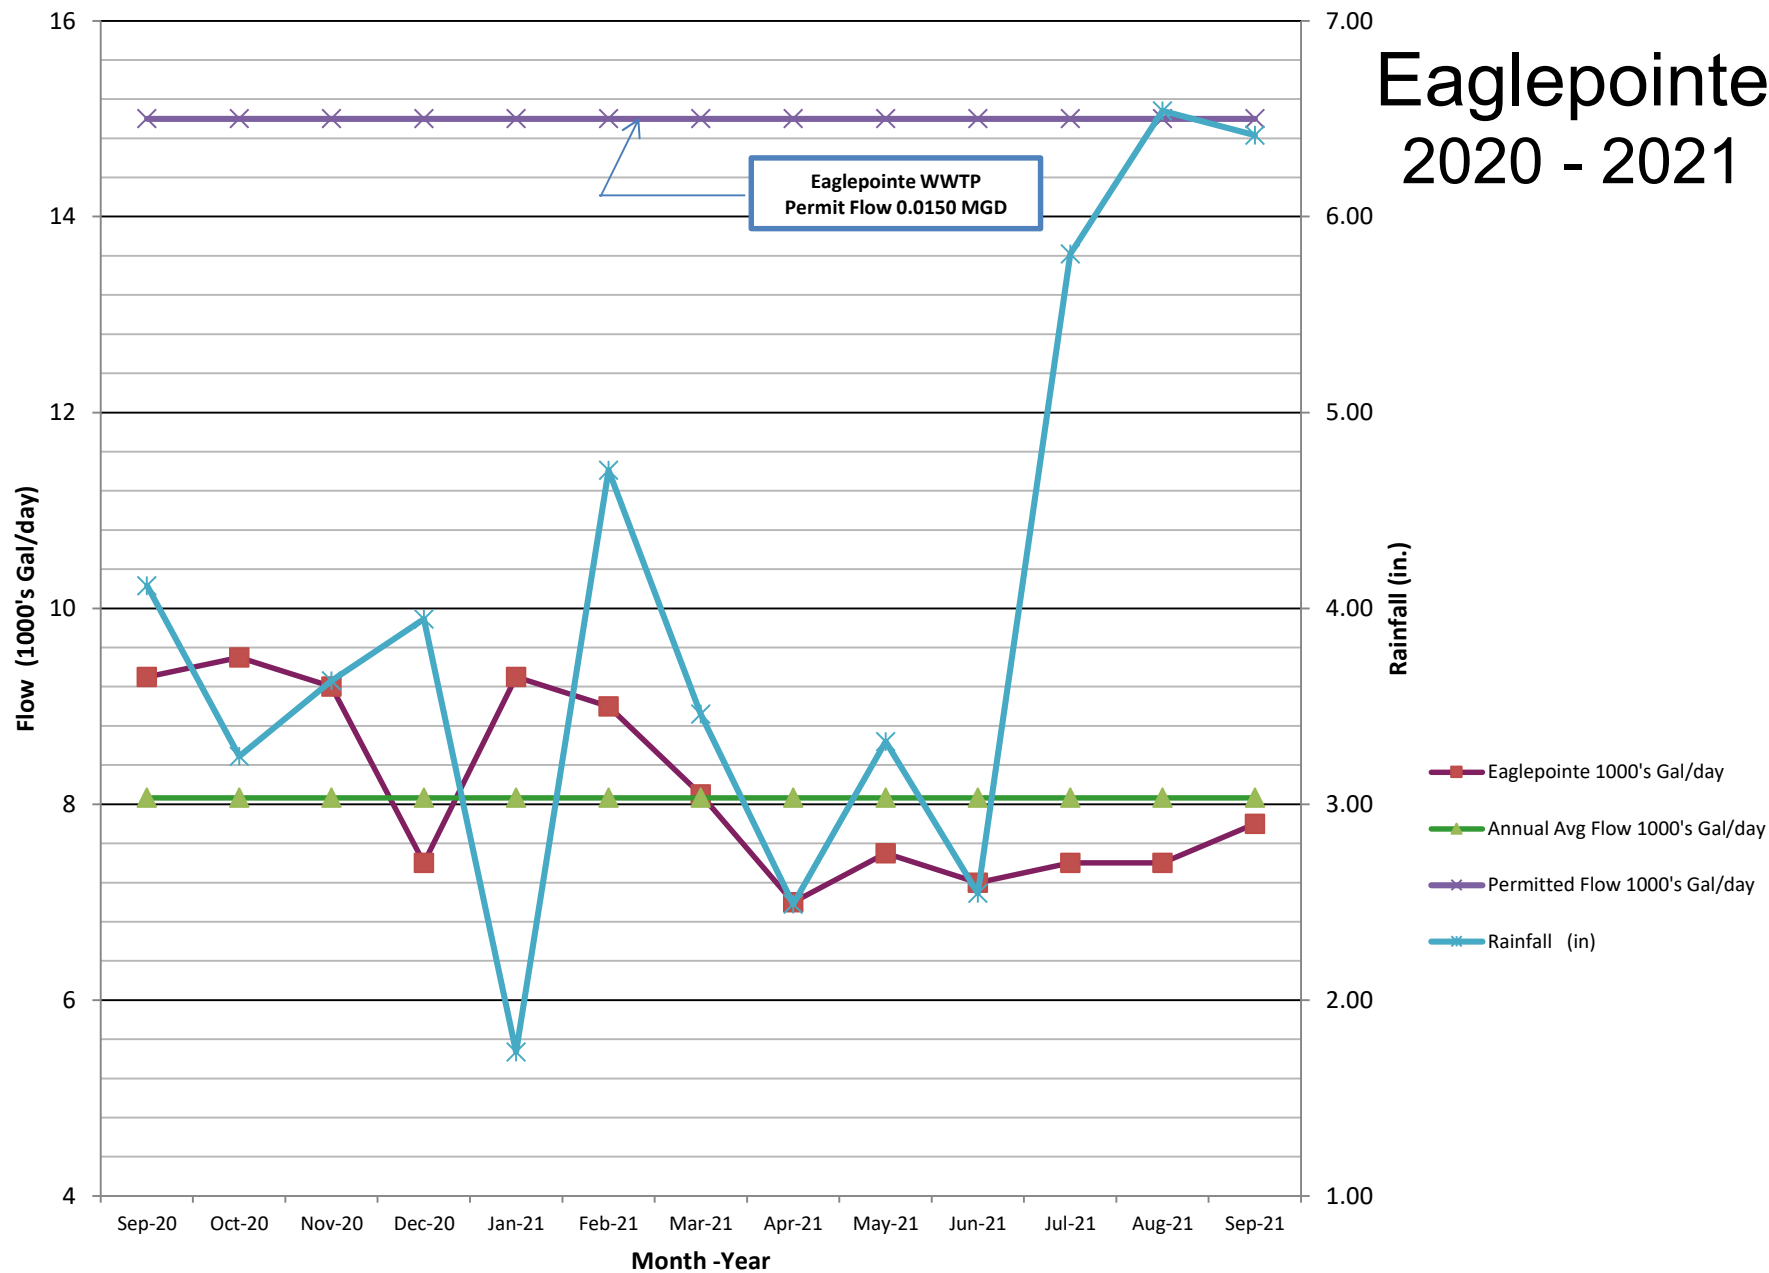


Greenridge 2020 - 2021

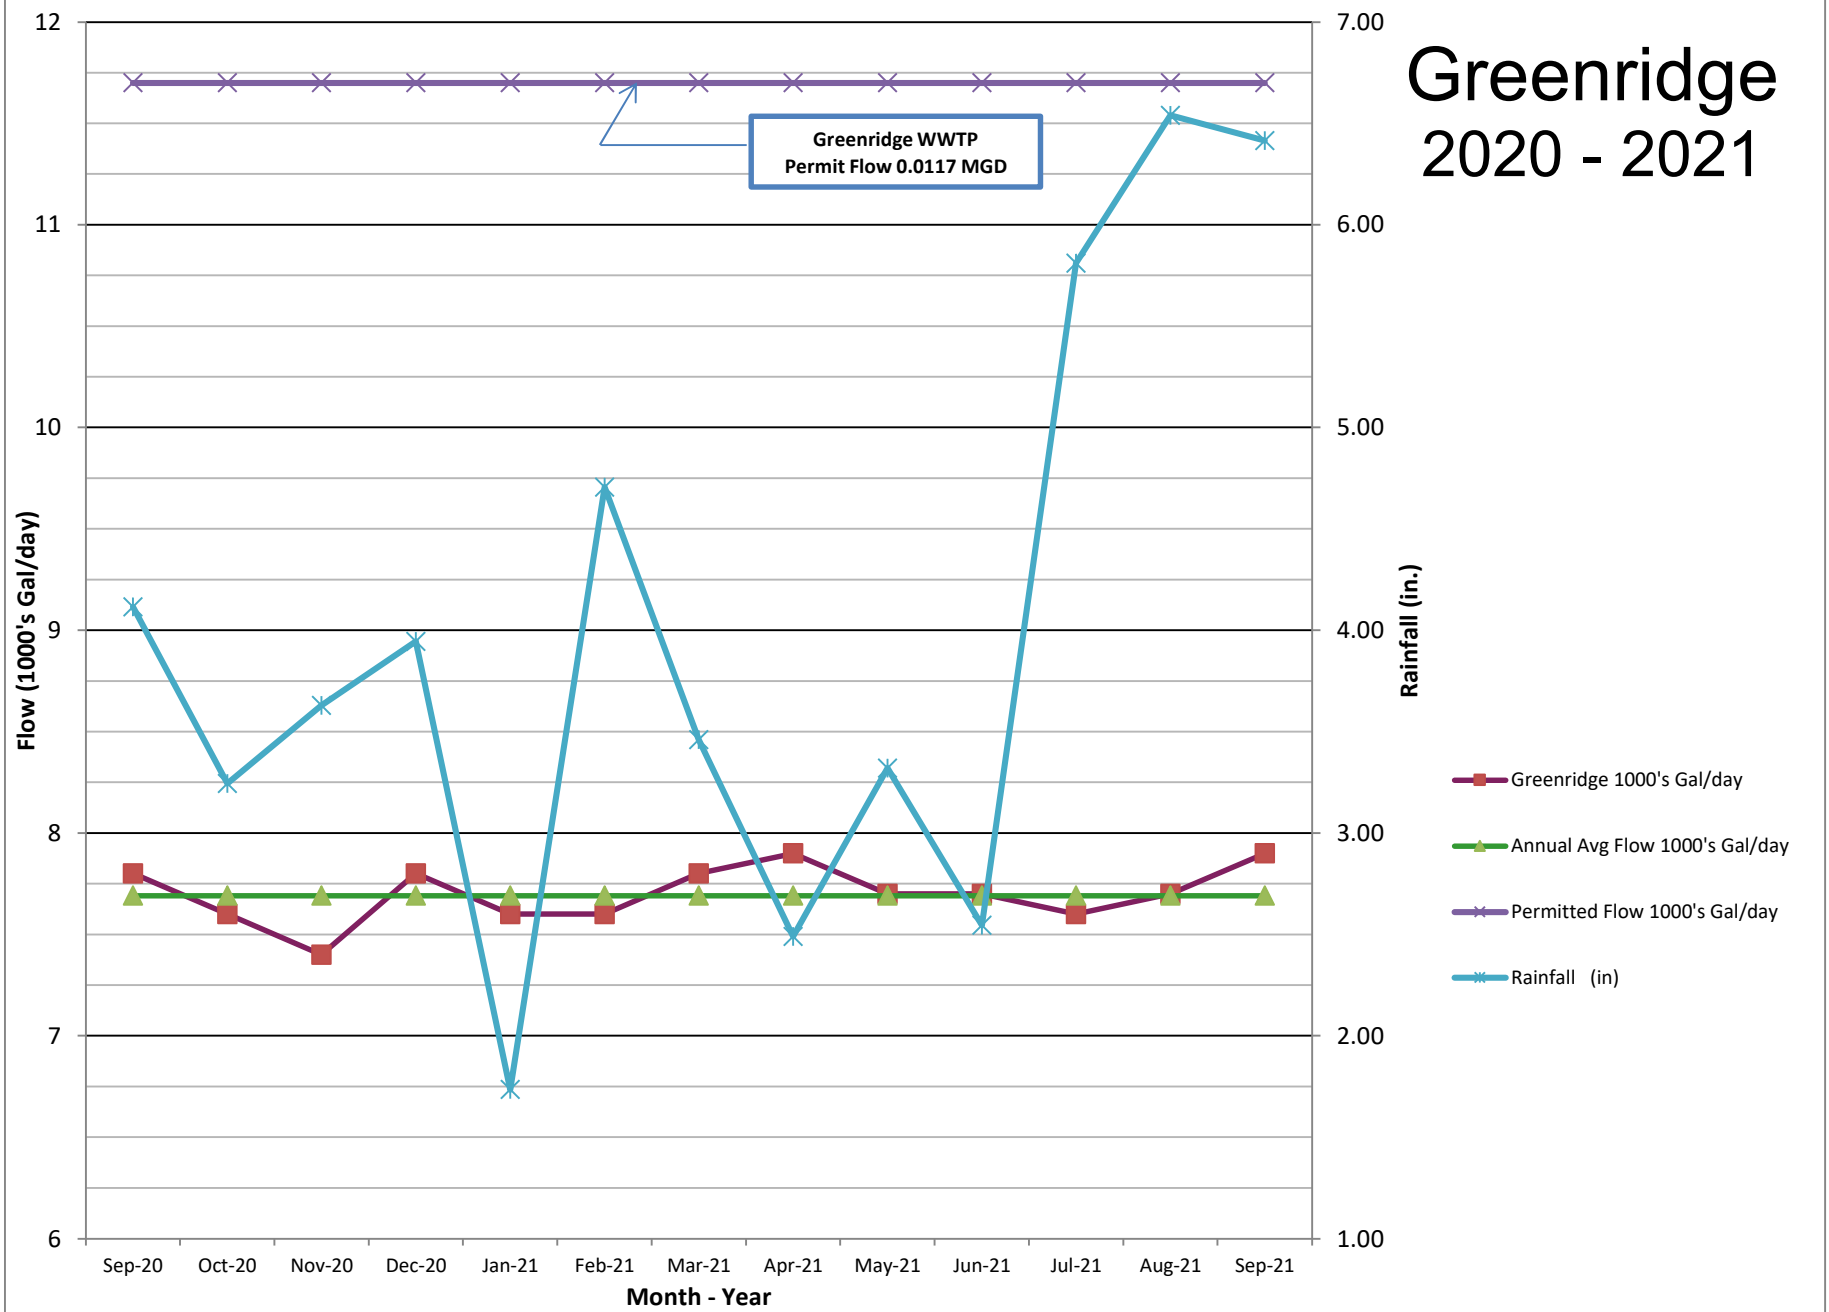


Lakeridge 2020 - 2021

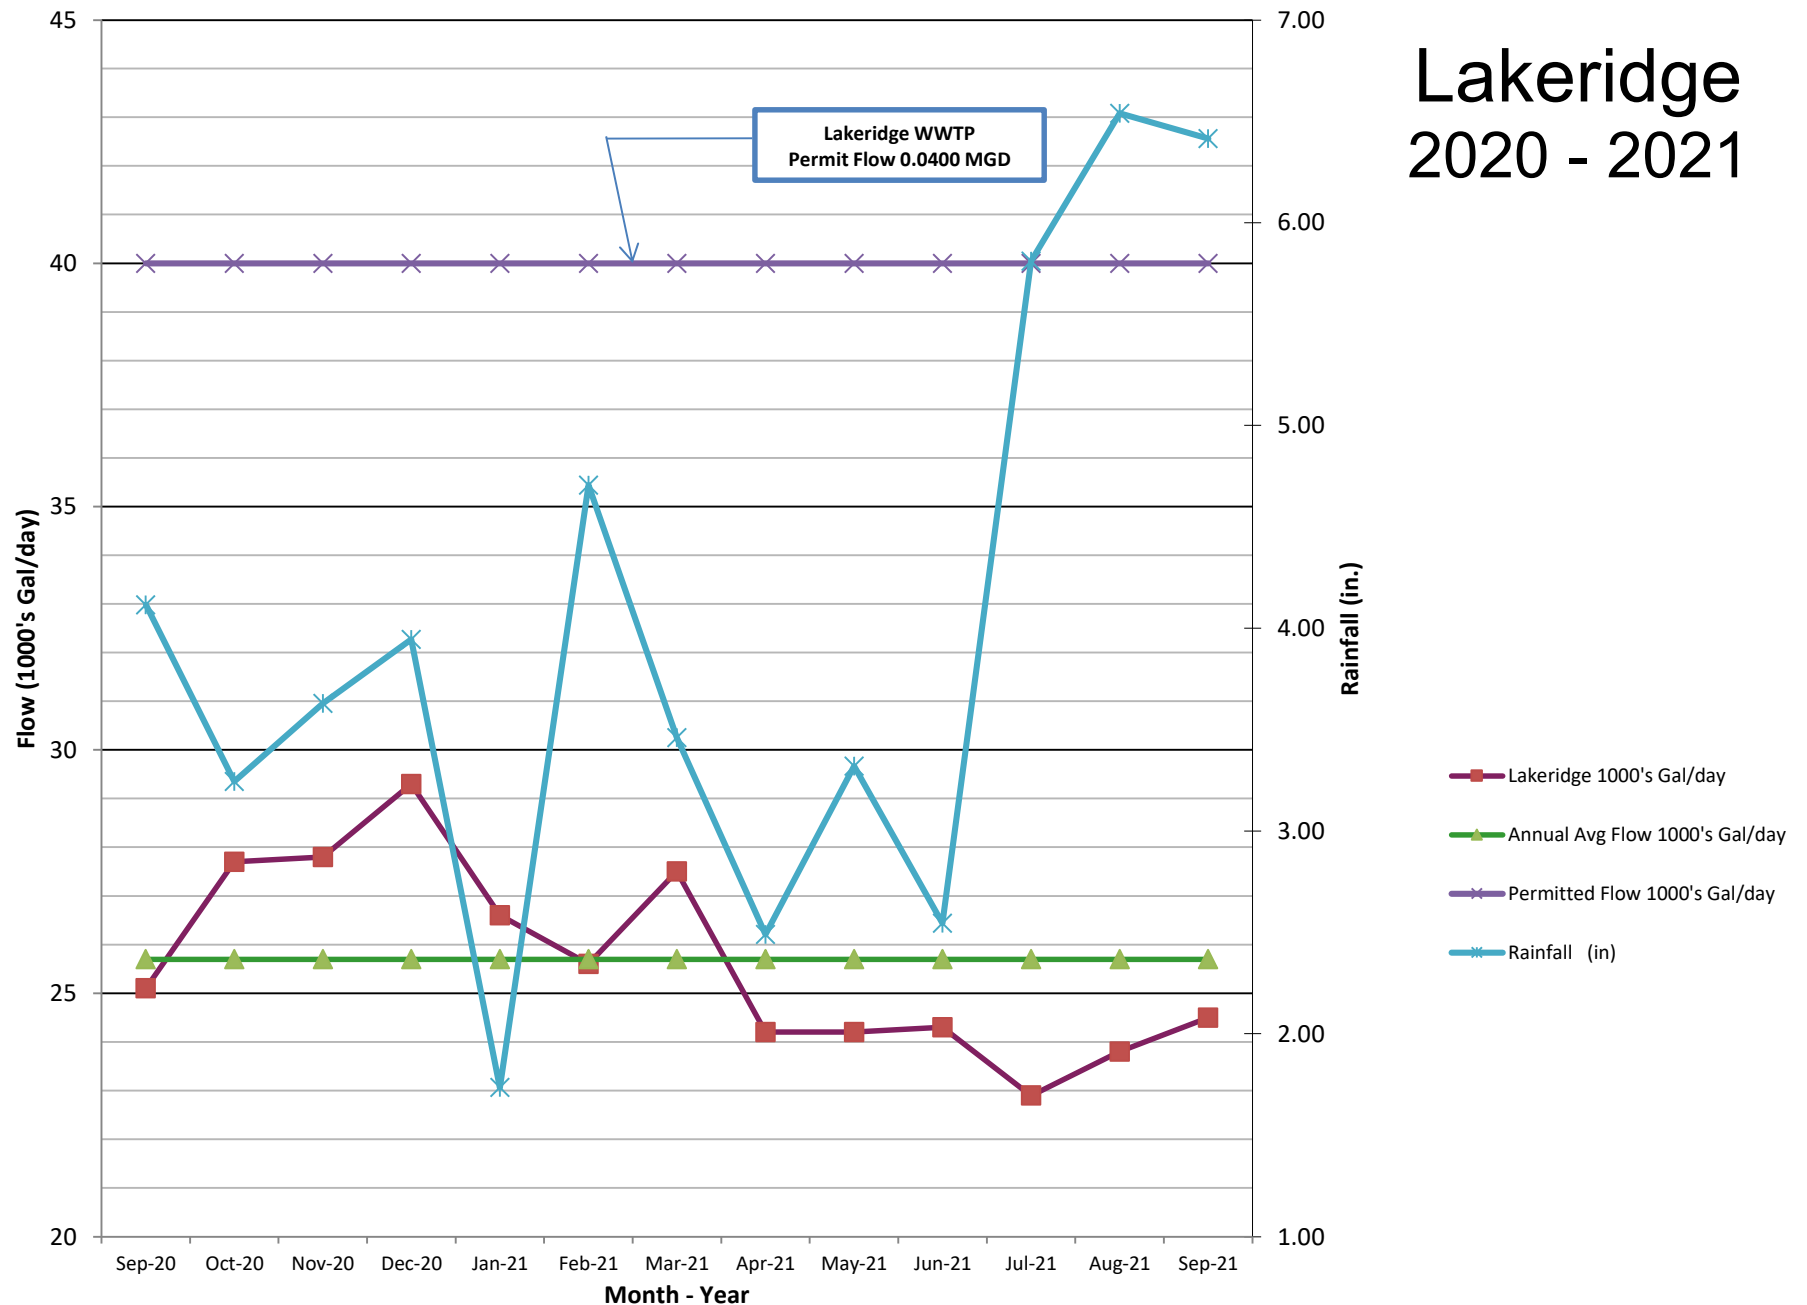


Marsh Harbour 2020 - 2021

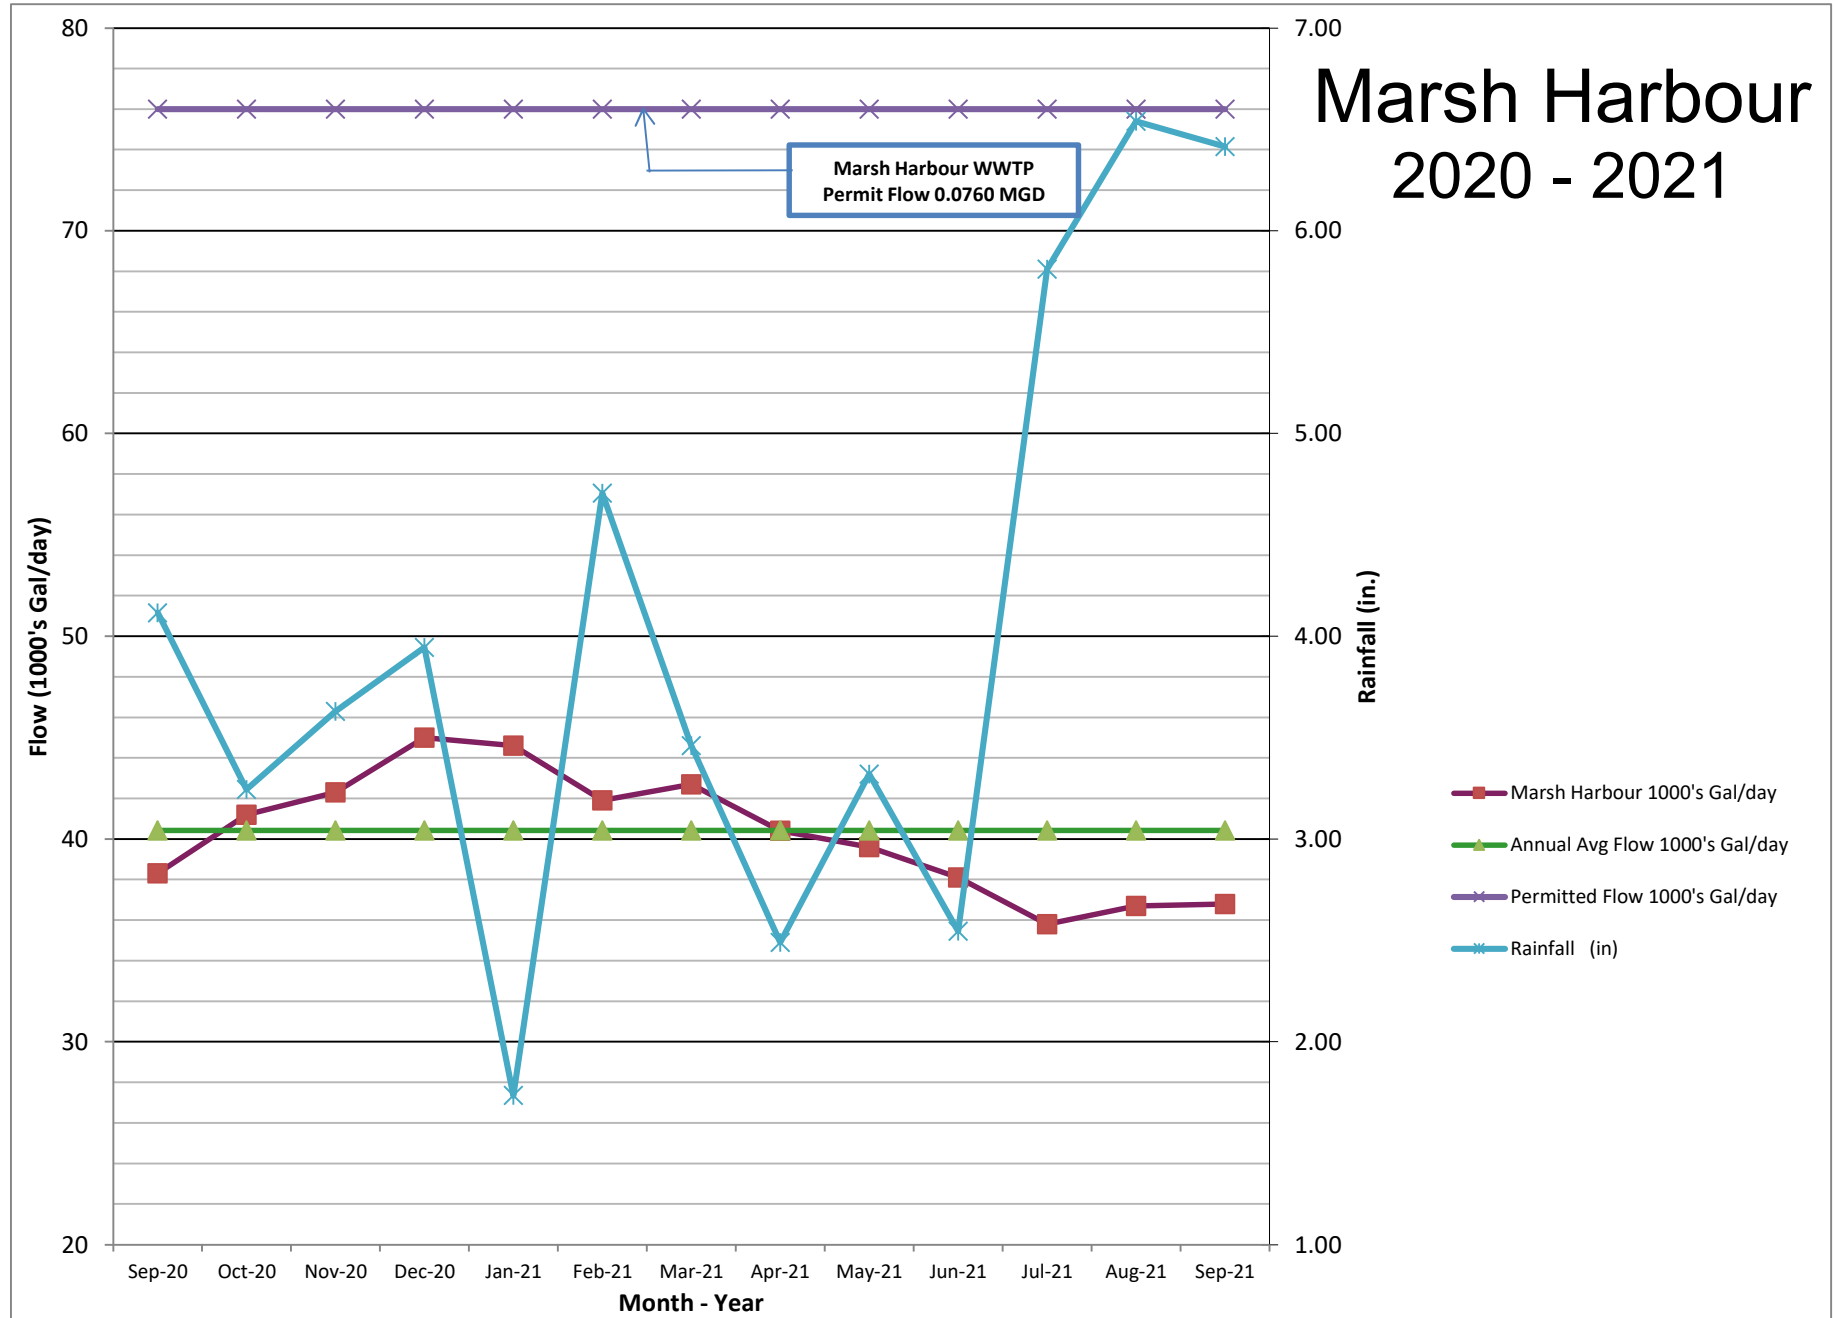


Route 100 2020 - 2021

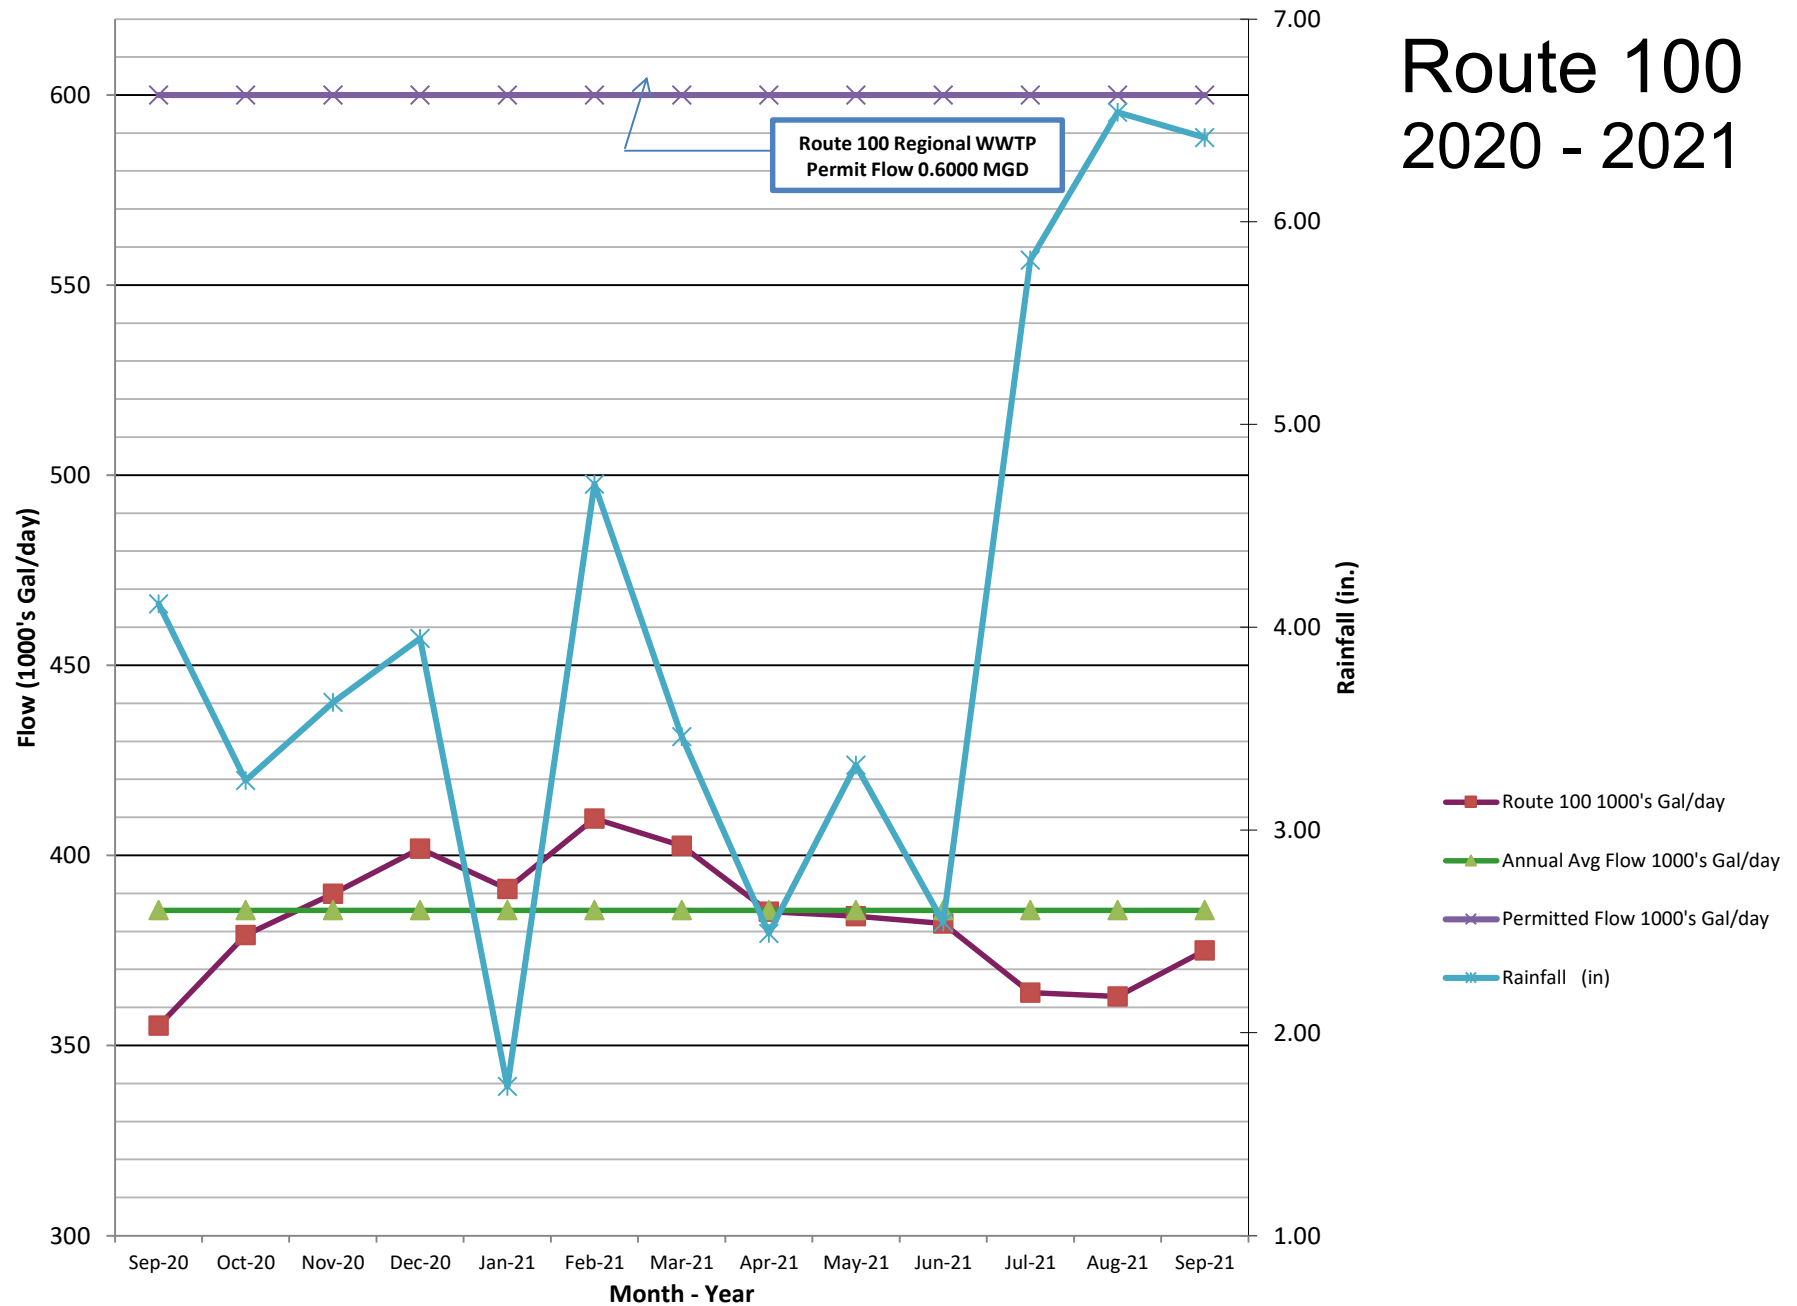

Saybrooke 2020 - 2021

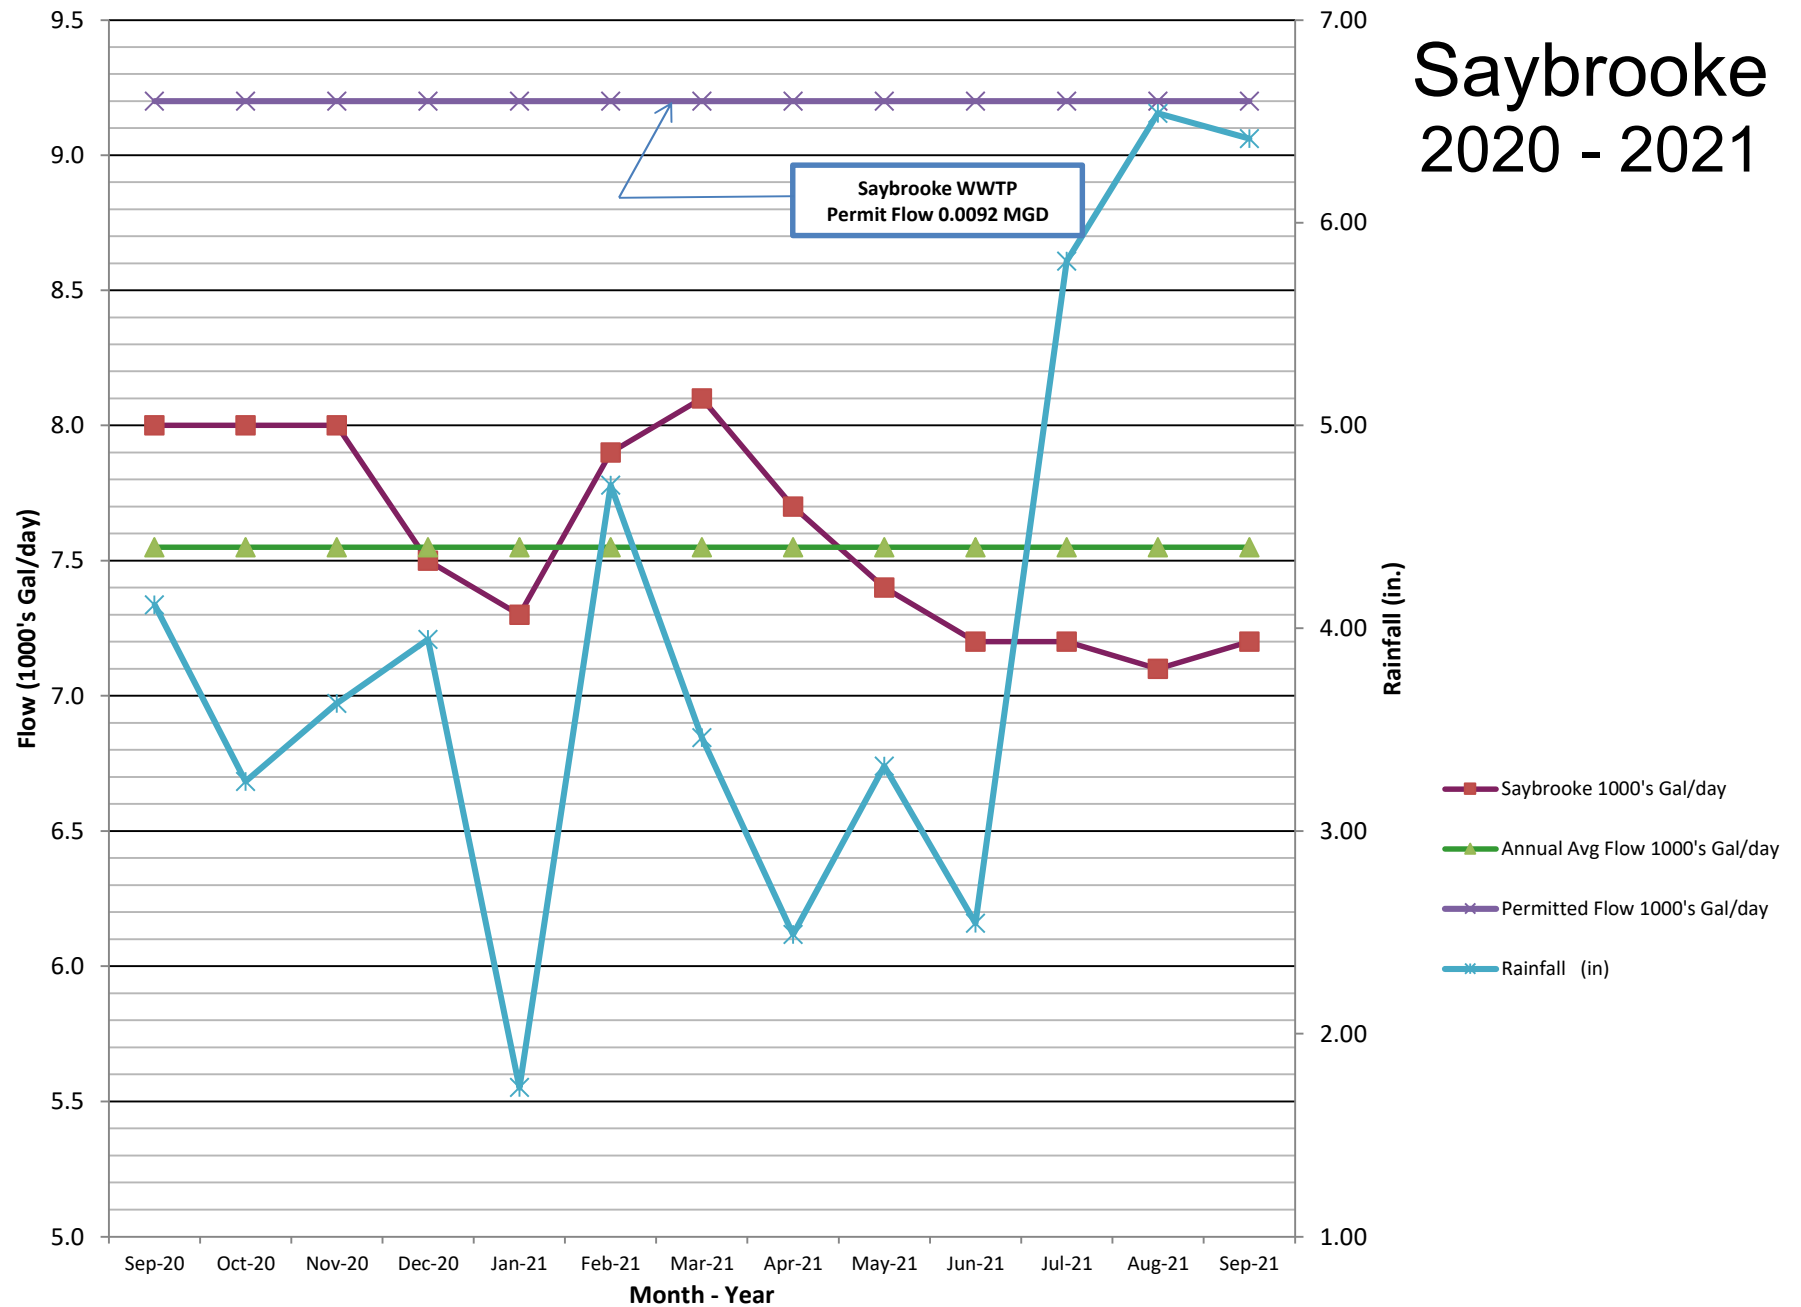

St. Andrews 2020 - 2021

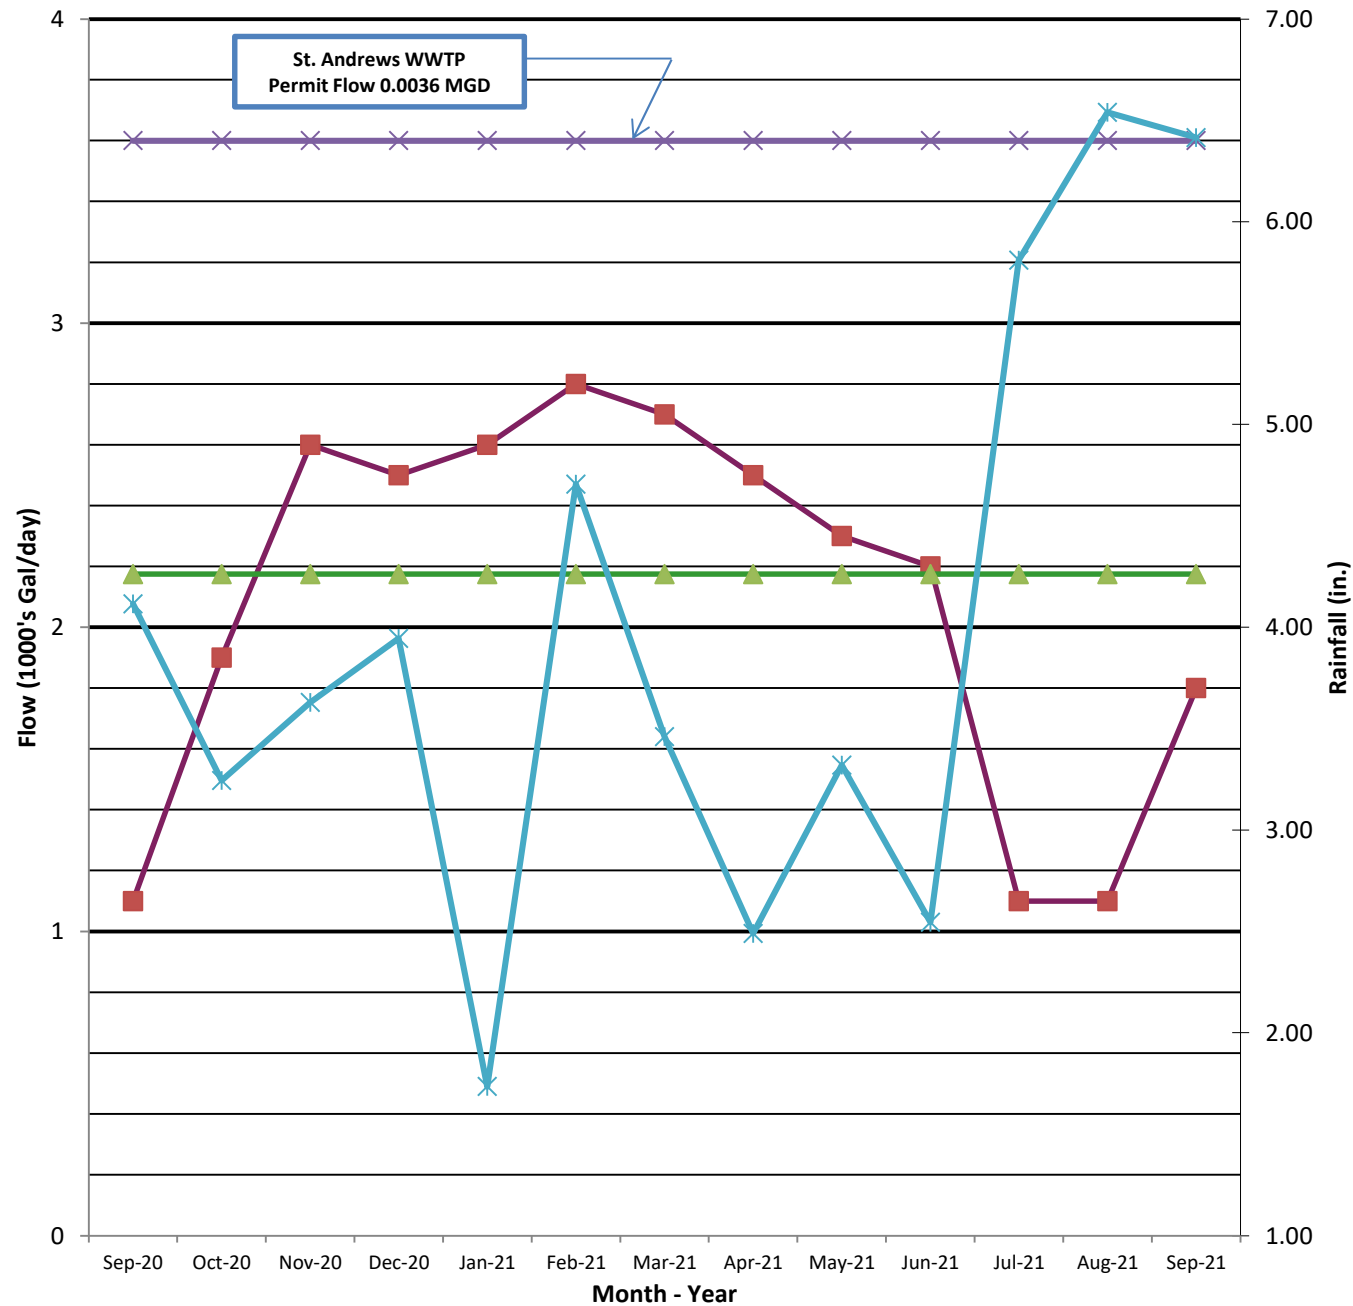



To: Municipal Authority Members

From: G. Matthew Brown, P.E., DEE

Re: Authority Administrator's Report

Date: October 21, 2021

Activities for the five-week month include:

- A. Communication with WWTF Operator, ARRO and Township Staff regarding operational and maintenance issues. (55.0 hours)
- B. Preparation of administrative documents for the Authority meeting packet and for the Authority files. (4.0 hours)
- C. Ongoing communication with a resident in Stonehedge relative to concern over sewage odors adjacent to the former COLDS disposal field. This includes discussion with ARRO and the Municipal Authority members. (1.0 hours)
- D. Communication regarding septic system issues and/or possible connection to the sanitary sewer system. Inquiries included residents on Carriage Drive, Meadow Creek Lane and Byers Road. (2.0 hours)
- E. Further technical review of design information for the Greenridge WWTF upgrade and Meadow Creek Lane sewer line location. (4.0 hours)
- F. Communication with ARRO, PADEP, the Authority Solicitor and developer engineer regarding the WQM Permit for construction of Phase III of the Route 100 WWTF. (8.0 hours)
- G. Communication with Adam Loew, Authority Solicitor and ARRO regarding the construction in the easement at the Eaglepointe Shopping Center. (10.0 hours)

Please advise if you have any questions or comments.



SEPTEMBER 2021 REPORT UUT MUNICIPAL AUTHORITY PUBLIC WORKS DEPARTMENT

The following projects are underway:

Ongoing:

- **Locks were spot checked at all pump stations. All have been secure.**
- **Spot checks continue and all visitors are still using the sign-in sheets at all properties.**

Public Works continues to work on the properties as follows:

Complete:

- **Route 100 WWTP**
 - **General cleaning**
 - **Trash removal**
 - **Restroom cleaned**
 - **Site checks**
 - **Sanitized all handles**
 - **Cut trees, shrubs, and weeds from fencing all around the perimeter of the plant.**
- **Byers Station Effluent PS**
 - **General cleaning**
 - **Site checks**
- **Byers Station Influent PS**
 - **General cleaning of station**
 - **Scrubbed floors**
 - **Site checks**
- **Ewing PS**
 - **General cleaning of station**
 - **Site checks**
- **Ewing West Vincent PS**
 - **General cleaning of station**
 - **Site checks**

- **Ewing Tract Effluent Disposal System**
 - **Site checked**
 - **Cleaned facility**
- **Eagle Hunt**
 - **Site check**
 - **General cleaning of this location**
- **Windsor Ridge**
 - **General cleaning**
 - **Site checks**
- **Saybrooke WWTP**
 - **Site checks**
 - **General cleaning of station**
- **Seabury**
 - **Site check**
- **Yarmouth PS1**
 - **Site checked**
- **Yarmouth PS2**
 - **Site checks**
- **St Andrews Brae**
 - **Site checks**
 - **Cleaned facility**
- **St Andrews Brae PS (at St Andrews intersection)**
 - **Site checks**
- **Reserve Lagoon**
 - **Site checks**
 - **General cleaning of station**
 - **Replaced broken fencing**
- **Reserve at Eagle PS1**
 - **Site checks**
 - **General cleaning of station**
- **Reserve at Eagle PS 2**
 - **Site checks**
 - **General cleaning of station**

- **Upland Farms PS/ Reserve at Waynebrook**
 - **Site checks**
 - **Cleaned facility**
- **Greenridge**
 - **Cleaning of station**
 - **Site checks**
- **Stonehedge**
 - **Site checks**
 - **General cleaning**
- **Marsh Harbour WWTP**
 - **Site checks**
 - **General cleaning**
- **Marsh Harbour PS**
 - **Site checks**
- **Meadowcreek**
 - **Site checks**
- **Eaglepointe**
 - **Trash collection and cleaning**
 - **Site checks**
 - **Mowed grass and weeded**
- **Heron Hill PS**
 - **Site check**
- **Lakeridge WWTP**
 - **General cleaning**
 - **Site checks**
- **Lakeridge Pump Station**
 - **Site check**
- **Eagle Farms Rd PS (WV)**
 - **Started cleaning of light fixtures**
 - **General cleaning of station**
- **Little Conestoga Rd PS**
 - **Cleaned facility**
 - **Site checks**
 - **Mowed grass**
- **Eagle Manor PS (Dorothy Lane)**
 - **Site checks**

- **Garrison Dr. (spray field pump station #1)**
 - **Site checked**
- **Garrison Dr. (spray field pump station #2)**
 - **Site checked**
 - **Cleaned trash and recycling**
- **Public Works continues to respond to Pa 1-calls. UUT responded to 107 PA 1-Call tickets during the month.**
- **All properties continue to be mowed.**

Respectfully submitted,

**Michael G. Heckman
Director of Public Works
Upper Uwchlan Township**